

RediPower

Industrial^{Tools}



NEW

Supplement to catalogue - October 2007



Ready when you are

Impact wrenches - MAGNESIUM

Composite body and low weight

FEATURES

- High power
- RP8222/42/52 Composite body and magnesium clutch housing
- RP8072/73/84/85 100% Magnesium housing
- Twin Hammer clutch
- Forward position: 3 power settings
- Slim style noise
- Cushion grip handle

BENEFITS

- Low noise and lightweight tools
- Great durability and power
- Operator comfort

NEW



High torque in 100% Magnesium body

NEW



MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION	AIR INLET
		in.	rpm	Nm	ft.lb	Nm	ft.lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²	NPTF
RP8222	615 190 8222	3/8	11,500	250-400	184-295	450	331	15.0	32.0	177	6.96	1.15	2.53	89	100	3.9	1/4"
RP8242	615 190 8242	1/2	11,500	250-400	184-295	450	331	15.0	32.0	177	6.96	1.20	2.64	89	100	3.9	1/4"
RP8252	615 190 8252	1/2	9,000	300-800	220-590	900	664	13.6	28.8	200	7.87	2.00	4.40	94	105	7.9	1/4"
RP8072	615 190 8072	3/4	6,500	135-1300	100-960	1650	1217	17.0	36.0	230	9.05	4.85	10.70	94	105	9.0	3/8"
RP8073	615 190 8073	3/4	6,500	135-1300	100-960	1650	1217	17.0	36.0	387	15.23	5.85	12.90	94	105	9.0	3/8"
RP8084	615 190 8084	1	6,500	135-1300	100-960	1650	1217	17.0	36.0	230	9.05	5.05	11.10	94	105	9.0	3/8"
RP8085	615 190 8085	1	6,500	135-1300	100-960	1650	1217	17.0	36.0	387	15.23	5.90	13.00	94	105	9.0	3/8"

@90 PSI(@6.3 Bar) - Listed specifications are for reference only. Please check documents in each tool. RP8222/42/52: Hose int. Ø 10mm (3/8") - RP8072/73/84/85 Ø 12mm (1/2").

Random orbital sanders

Non vacuum (NV), central vacuum (CV), or self vacuum (SV)

FEATURES

- Random orbital sander
- 152 mm (6") Hook & loop (H&L) and PSA sanding pads
- Orbit: 2.5 mm (3/32"), 5 mm (3/16"), 10 mm (3/8")
- Adjustable speed regulator
- 165 W (0.22hp) motor for high performance
- Round palm shape and contoured composite housing for operate comfort
- Exhaust hose swivel (CV)
- Low vibration level $<2.5 \text{ m/s}^2$

BENEFITS

- Ergonomic and lightweight tool to improve operator comfort
- Ideal shape for vertical and horizontal applications



MODEL	PART NUMBER	FREE SPEED	PAD SIZE		SPINDLE THREAD	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		PAD TYPE	NOISE LEVEL	VIBRATION	AIR INLET	VAC
		rpm	mm	in.	in.	l/s	cfm	mm	in.	kg	lb		dB(A)	m/s ²	NPTF	
RANDOM ORBITAL SANDERS - 2.5 mm (3/32") ORBIT																
RP3600	615 193 3600	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.59	H&L	81	<2.5	1/4"	NV
RP3601	615 193 3601	12,000	152	6	5/16-24	8	16.9	185	7.2	0.72	1.59	PSA	81	<2.5	1/4"	NV
RP3602	615 193 3602	12,000	152	6	5/16-24	8	16.9	232	9.2	0.76	1.67	H&L	81	<2.5	1/4"	SV
RP3603	615 193 3603	12,000	152	6	5/16-24	8	16.9	232	9.2	0.76	1.67	PSA	81	<2.5	1/4"	SV
RP3604	615 193 3604	12,000	152	6	5/16-24	8	16.9	221	8.7	0.77	1.70	H&L	81	<2.5	1/4"	CV
RP3605	615 193 3605	12,000	152	6	5/16-24	8	16.9	221	8.7	0.77	1.70	PSA	81	<2.5	1/4"	CV
RANDOM ORBITAL SANDERS - 5 mm (3/16") ORBIT																
RP3610	615 193 3610	12,000	152	6	5/16-24	8	16.9	185	7.2	0.74	1.63	H&L	81	<2.5	1/4"	NV
RP3611	615 193 3611	12,000	152	6	5/16-24	8	16.9	185	7.2	0.74	1.63	PSA	81	<2.5	1/4"	NV
RP3612	615 193 3612	12,000	152	6	5/16-24	8	16.9	232	9.2	0.78	1.72	H&L	81	<2.5	1/4"	SV
RP3613	615 193 3613	12,000	152	6	5/16-24	8	16.9	232	9.2	0.78	1.72	PSA	81	<2.5	1/4"	SV
RP3614	615 193 3614	12,000	152	6	5/16-24	8	16.9	221	8.7	0.79	1.74	H&L	81	<2.5	1/4"	CV
RP3615	615 193 3615	12,000	152	6	5/16-24	8	16.9	221	8.7	0.79	1.74	PSA	81	<2.5	1/4"	CV
RANDOM ORBITAL SANDERS - 10 mm (3/8") ORBIT																
RP3620	615 193 3620	12,000	152	6	5/16-24	8	16.9	185	7.2	0.79	1.74	H&L	81	<2.5	1/4"	NV
RP3621	615 193 3621	12,000	152	6	5/16-24	8	16.9	185	7.2	0.79	1.74	PSA	81	<2.5	1/4"	NV
RP3622	615 193 3622	12,000	152	6	5/16-24	8	16.9	232	9.2	0.82	1.81	H&L	81	<2.5	1/4"	SV
RP3623	615 193 3623	12,000	152	6	5/16-24	8	16.9	232	9.2	0.82	1.81	PSA	81	<2.5	1/4"	SV
RP3624	615 193 3624	12,000	152	6	5/16-24	8	16.9	221	8.7	0.83	1.83	H&L	81	<2.5	1/4"	CV
RP3625	615 193 3625	12,000	152	6	5/16-24	8	16.9	221	8.7	0.83	1.83	PSA	81	<2.5	1/4"	CV

@90 PSI (@6.3 Bar) - Listed specifications are for reference only. Please check documents in each tool. All models: Hose int. Ø10 mm (3/8").

www.readywhenyouare.com



Please find your local contact at: www.cp.com



Chicago
Pneumatic

Desoutter

GEORGES
RENAULT

SCANROTOR

techmotive

RediPower

USA 615 994 850 8
© Copyright 2007 CP

Speciality tools

RediPower

Nibbler RP9888 Good cutting control



NEW

FEATURES

- Rugged nibbling head and 50 mm (1.97") diameter punch
- Cuts steel up to 16 gauge (1.5 mm - 0.06") and aluminum up to 10 gauge (2.5 mm - 0.1")
- Lever throttle for low speed starting
- 4 optional cutting positions

BENEFITS

- Easy to operate and control
- Perfect for accurate cutting and best for tight corners and circles
- Used for nibbling plastic, tin, aluminum and others metals

Shear RP9889 Reliable and Powerful



NEW

FEATURES

- Heavy duty shear head
- Powerful motor (370 W - 0.5 hp) to cut up to 18 gauge steel (1.1 mm - 0.04")
- Triple idler planetary gearing
- Ergonomic handle

BENEFITS

- Smooth operation and operator comfort
- Reliable cutting performance
- Excellent tool for cutting squares and angles in all types of aluminum, tin, and steel

Air files RP9705/10 Powerful and precise



NEW

FEATURES

- 5 mm (0.2") and 10 mm (0.4") stroke air filer
- High blow per minute and power
- Safety lever
- 360° swivel air inlet
- Cushion grip handle
- 4 type of files included (flat, half round, round, triangular)

BENEFITS

- Excellent tool for use in confined areas
- Ideal tool for precise work
- Deburring or shapening sheet metal, iron and plastic

MODEL	PART NUMBER	BLOWS PER MIN.	OSCILLATION	AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	VIBRATION	AIR INLET
			BPM	l/s	cfm	mm	in.	kg	lb	dB(A)	m/s ²	NPTF
RP9888	615 197 9888	2,750	-	2.6	5.5	195	7.67	1.10	2.42	90	5.4	1/4"
RP9889	615 197 9889	2,400	-	2.4	5.0	220	8.66	1.12	2.48	92	3.2	1/4"
RP9705	615 193 9705	12,000	3-5	2.8	6.0	204	8.03	0.56	1.23	84	5.0	1/4"
RP9710	615 193 9710	8,000	7-10	2.8	6.0	250	9.84	0.59	1.30	74	5.0	3/8"


@90 PSI(@6.3 Bar) - Listed specifications are for reference only. Please check documents in each tool. All models: Hose int. Ø 10mm (3/8").

Accessories


RediPower

Orbital sanders accessories






 2.5 mm (3/32") Dia. Orbit
 For Ultra Fine
 sanding



 5 mm (3/16") Dia. Orbit
 For General
 sanding



 10 mm (3/8") Dia. Orbit
 For Aggressive
 sanding



SANDING PADS

MODEL		PART NUMBER
RP3600/02/04	150 mm (6") Pad Hook & Loop	205 052 303 3
RP3601/03/05	150 mm (6") Pad PSA	205 052 302 3
RP3610/12/14/20/22/24	150 mm (6") Pad Hook & Loop with 6 holes	205 052 305 3
RP3611/13/15/21/23/25	150 mm (6") Pad PSA with 6 holes	205 052 304 3

DUST EXTRACTION KIT FOR SELF GENERATE VACUUM


MODEL		PART NUMBER
RP3602/03/12/13/22/23	Dust extraction kit (Incl. 1 dust bag and its dust hose)	205 052 245 3
RP3602/03/12/13/22/23	Dust bag set (Incl. 5 dust bags)	205 052 320 3
RP3602/03/12/13/22/23	Dust bag set (Incl. 1 dust bag)	205 052 306 3

VACUUM HOSE ADAPTATOR FOR CENTRAL VACUUM SANDERS

MODEL		PART NUMBER
RP3604/05/14/15/24/25	Vacuum hose adaptor ø25 mm (1") / ø32 mm (1-1/4")	615 350 117 0
RP3604/05/14/15/24/25	Vacuum hose adaptor ø25 mm (1") / ø28 mm (1-1/4")	615 804 448 0

MISCELLANEOUS

MODEL		PART NUMBER
RP3600/01/02/03/04/05	Swivel air inlet	205 052 373 3
All Models	Pad wrench	205 052 309 3

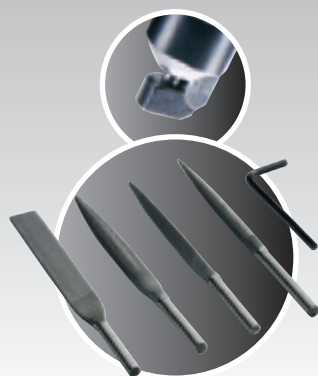

NIBBLER RP9888

	PART NUMBER
Punch set	KF137310
Die	KF137273

FILE FOR RP9705/10

	PART NUMBER
5 mm (0.2") Shank File Rectangular (5)	205 051 911 3
5 mm (0.2") Shank File round (5)	205 051 912 3
5 mm (0.2") Shank File half round (5)	205 051 913 3
5 mm (0.2") Shank File triangular (5)	205 051 914 3
Swivel air inlet	205 052 373 3

Tune-up kits & Repair kits

MODEL	TUNE-UP KIT	REPAIR KIT
RP8222	205 052 137 3	205 052 139 3
RP8242	205 052 138 3	205 052 140 3
RP8252	205 052 141 3	205 052 142 3
RP36.. SERIE	205 052 240 3	205 052 243 3

MODEL	TUNE-UP KIT	REPAIR KIT
RP8072/73/84/85	205 052 051 3	
RP8072		205 052 052 3
RP8073		205 052 231 3
RP8084		205 052 053 3
RP8085		205 052 232 3