




Inline Filter or Pressure Filter for Manifold Mounting HF2P

up to 100 l/min, up to 280 bar



1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

The filter housings are designed in accordance with international regulations. They consist of a filter head with screw-in filter bowl.

Standard equipment:

- with bypass valve
- connection for a clogging indicator

1.2 FILTER ELEMENTS

HYDAC filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Filter elements are available with the following pressure stability values:

Betamicon® (BN): 20 bar
Betamicon® (BH): 210 bar

1.3 FILTER SPECIFICATIONS

Nominal pressure	280 bar
Fatigue strength	at nominal pressure 10 ⁶ load cycles from 0 to nominal pressure
Temperature range	-30 °C to +100 °C
Material of filter head	EN-GJS
Material of filter bowl	Steel
Type of clogging indicator	VD (differential pressure indicator up to 420 bar operating pressure)
Pressure setting of clogging indicator	5 bar (others on request)
Cracking pressure of bypass valve	6 bar (others on request)

1.4 SEALS

NBR (= Perbunan)

1.5 MOUNTING

As inline filter or pressure filter for manifold mounting

1.6 SPECIAL MODELS AND ACCESSORIES

- without bypass valve
- without connection for a clogging indicator

1.7 SPARE PARTS

See Original Spare Parts List


1.8 CERTIFICATES AND APPROVALS

On request

1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Non-flam operating fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (>50%) on request

Symbol for hydraulic systems

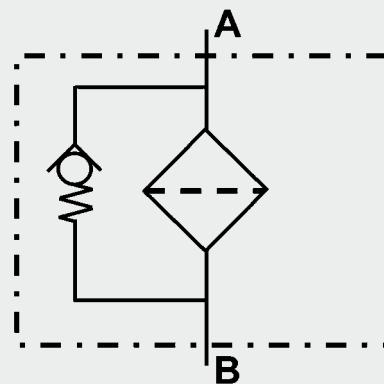

2. MODEL CODE (also order example)

HF2P BN 04 G 3 C 1 . X /12 V-B6

2.1 COMPLETE FILTER

Filter type

HF2P

Filter material of element

BN Betamicon® (BN)

BH Betamicon® (BH)

Size of filter or element

04 4"

08 8"

Port

G threaded port

F flange port

Filtration rating in µm

BN : 3, 6, 12, 25

BH : 3, 6, 10, 17

Type of clogging indicator

W without connection for clogging indicator

A with steel blanking plug in indicator port

B visual

C electrical

D visual and electrical

for other clogging indicators

see brochure no. 7.050../..

J electrical switch (Brad Harrison 5 Pin Mini)

J4 electrical switch (Brad Harrison 4 Pin Micro)

Type code

1

Modification number

X the latest version is always supplied

Supplementary details

no details = manifold mounted version

0 G ¾" BSPP

12 SAE-12 O-ring boss

B. bypass cracking pressure (e.g. B3 = 3 bar); no details = without bypass valve

L... light with appropriate voltage (24, 48, 110, 220 Volt)

LED 2 light emitting diodes up to 24 Volt

V FPM seals

W suitable for HFA and HFC emulsions

only for clogging indicator

type "D"

2.2 REPLACEMENT ELEMENT

1.07.04 D 03 BN /-V

Size

04 4"

08 8"

Type

D

Filtration rating in µm

BN: 03, 06, 12, 25

BH: 03, 06, 10, 17

Filter material

BN, BH

Supplementary details

V (for descriptions, see point 2.1)

2.3 REPLACEMENT CLOGGING INDICATOR

VD 5 D . X /-L24

Type

VD differential pressure indicator up to 420 bar operating pressure

Pressure setting

5 5 bar standard, others on request

Type of clogging indicator

D (see point 2.1)

Modification number

X the latest version is always supplied

Supplementary details

L..., LED, V, W (for descriptions, see point 2.1)

3. FILTER CALCULATION / SIZING

The total pressure drop of a filter at a certain flow rate Q is the sum of the housing Δp and element Δp and is calculated as follows

$$\Delta p_{total} = \Delta p_{housing} + \Delta p_{element}$$
$$\Delta p_{housing} = \text{(see point 3.1)}$$
$$\Delta p_{element} = Q \cdot \frac{SK^*}{1000} \cdot \frac{viscosity}{30}$$


(*see point 3.2)

For ease of calculation, our Filter Sizing Program is available on request free of charge.

NEW: Sizing online at www.hydac.com

3.1 ΔP-Q HOUSING GRAPHS BASED ON ISO 3968





The housing graphs apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s. In this case, the differential pressure changes proportionally to the density.

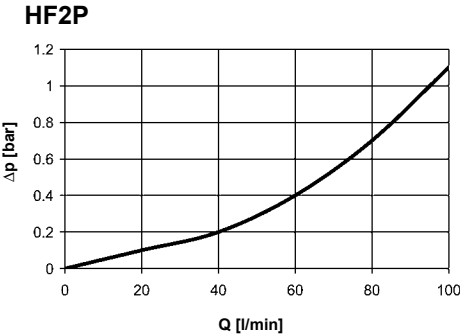

3.2 GRADIENT COEFFICIENTS (SK) FOR FILTER ELEMENTS


The gradient coefficients in mbar/(l/min) apply to mineral oils with a kinematic viscosity of 30 mm²/s. The pressure drop changes proportionally to the change in viscosity.

HF2P	BN				BH			
	3 μm	6 μm	12 μm	25 μm	3 μm	6 μm	10 μm	17 μm
04	22.40	17.14	16.03	8.81	30.11	26.81	20.93	12.12
08	11.14	8.45	7.96	4.41	14.57	13.10	10.16	5.88

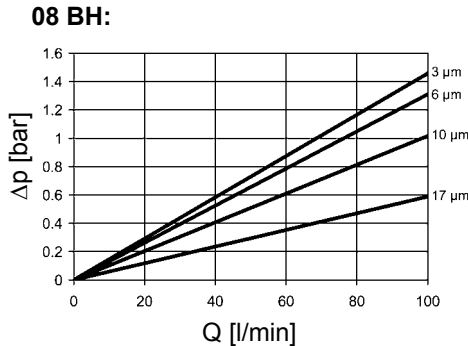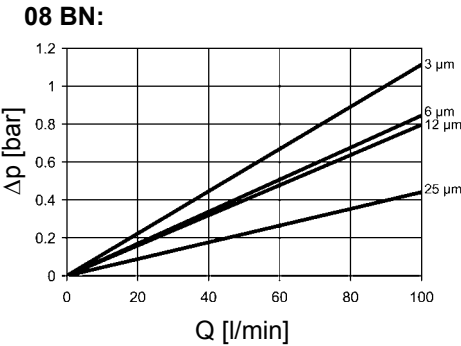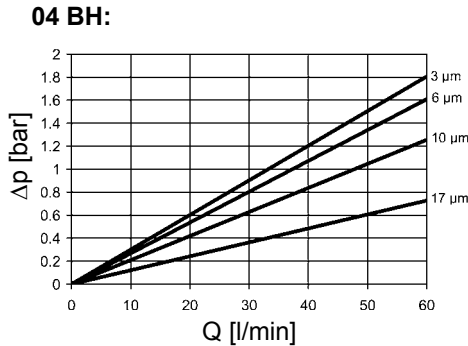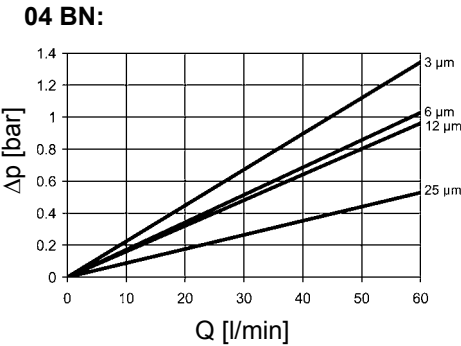


4. DIMENSIONS

HF2P

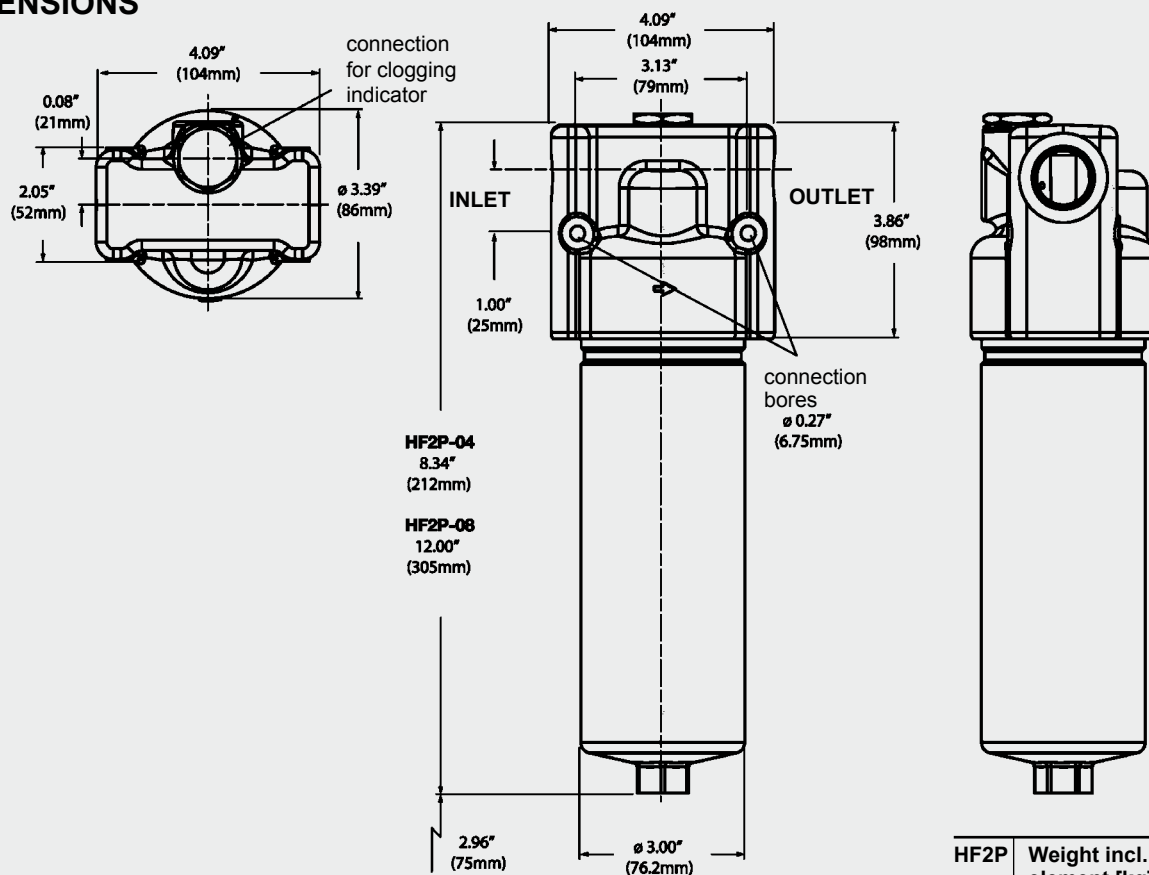

HF2P	Weight incl. element [kg]
04	4.58
08	6.08

MANIFOLD MOUNTING

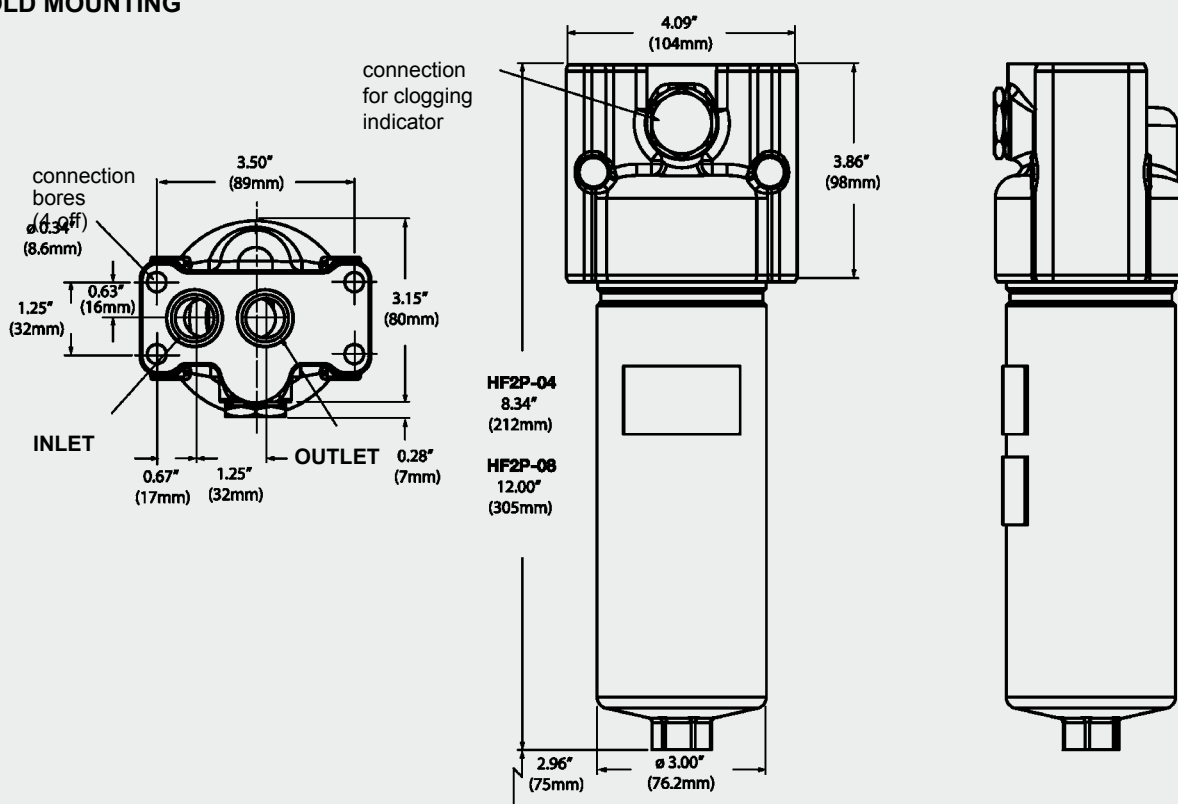

NOTE

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Filbertechnik GmbH
Industriegebiet
D-66280 Sulzbach/Saar
Tel.: 0 68 97 / 509-01
Fax: 0 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com