




Return Line Suction Filter RKMR

Element flow direction from in to out
In-tank versions:
up to 800 l/min, up to 10 bar



1. TECHNICAL SPECIFICATIONS

1.1 FILTER HOUSING

Construction

The filter housings are designed in accordance with international regulations. They consist of a filter cover plate and element location spigot. The element is removed from the top.

Standard equipment:

- with bypass valve
- magnetic core built into cover plate

1.2 FILTER ELEMENTS

Hydac filter elements are validated and their quality is constantly monitored according to the following standards:

- ISO 2941
- ISO 2942
- ISO 2943
- ISO 3724
- ISO 3968
- ISO 11170
- ISO 16889

Contamination retention capacities in g

Glass fibre (PGN)			
RKMR-KIT	5 µm	10 µm	25 µm
600	85	153	170
800	115	207	230

Glass fibre with pre-filter (GSN)			
RKMR-KIT	5 µm	10 µm	20 µm
600	272	408	459
800	368	552	621

Filter elements are available with the following pressure stability values:

Glass fibre (PGN): 6 bar
Glass fibre with pre-filter (GSN) 6 bar
Wire mesh (WR): 6 bar

1.3 FILTER SPECIFICATIONS

Nominal pressure	up to 10 bar
Temperature range	-30 °C to +120 °C
Material of cover plate	aluminium
Cracking pressure of bypass valve (optional)	on request

1.4 SEALS

NBR (= Perbunan)

1.5 MOUNTING

In-tank filter.

1.6 SPECIAL MODELS AND ACCESSORIES

- without magnetic core
- air bleed valve in cover plate
- protective strainer for bypass and anti-cavitation valve

1.7 SPARE PARTS

See Original Spare Parts List

1.8 CERTIFICATES AND APPROVALS

Test certificate 2.2
Other approvals on request


1.9 COMPATIBILITY WITH HYDRAULIC FLUIDS ISO 2943

- Hydraulic oils H to HLPD DIN 51524
- Lubrication oils DIN 51517, API, ACEA, DIN 51515, ISO 6743
- Compressor oils DIN 51506
- Biodegradable operating fluids VDMA 24568 HETG, HEES, HEPG
- Non-flam operating fluids HFA, HFB, HFC and HFD
- Operating fluids with high water content (>50% water content) on request

1.10 IMPORTANT INFORMATION

- Filter housing must be earthed
- When using electrical clogging indicators, the electrical power supply to the system must be switched off before removing the clogging indicator connector.

Symbol for hydraulic systems

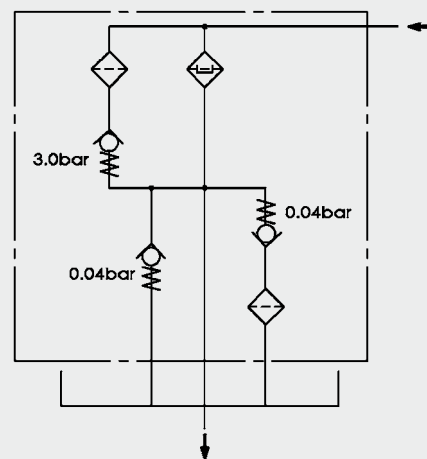

2. MODEL CODE (also order example)

RKMR PGN 800 SET 10 W 1 . X /-V

2.1 COMPLETE FILTER

Filter type _____

RKMR

Filter material of element _____

PGN glass fibre

GSN glass fibre with pre-filter

WR wire mesh

Size of filter or element _____

RKMR: 600, 800

In-tank version _____

SET filter cover plate and element location spigot only

Filtration rating in μm _____

PGN : 5, 10, 25

GSN : 5, 10, 20

WR : 25, 40, 60

Type of clogging indicator _____

W without connection for clogging indicator

Type code _____

1

Modification number _____

X the latest version is always supplied

Supplementary details _____

without details = standard bypass cracking pressure B3 = 3 bar

B. special bypass cracking pressure

V FPM seals

2.2 REPLACEMENT ELEMENT

0800 R 010 PGN /-V

Size _____

0600, 0800

Type _____

R

Filtration rating in μm _____

PGN : 005, 010, 025

GSN : 005, 010, 020

WR : 025, 040, 060

Filter material _____

PGN, GSN, WR

Supplementary details _____


V (for description, see point 2.1)

3. FILTER CALCULATION / SIZING


3.1 GRAPHS FOR COMPLETE FILTER

The total pressure drop graphs apply to mineral oil with a density of 0.86 kg/dm³ and a kinematic viscosity of 30 mm²/s.


RKMR 600 SET: PGN

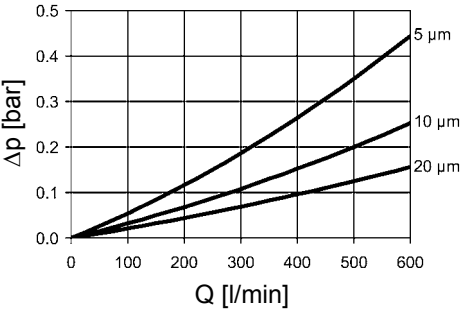


RKMR 600 SET: GSN

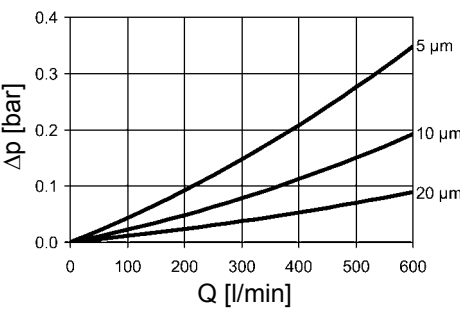

RKMR 800 SET: PGN

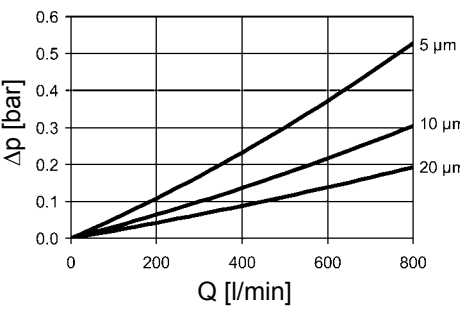


RKMR 800 SET: GSN

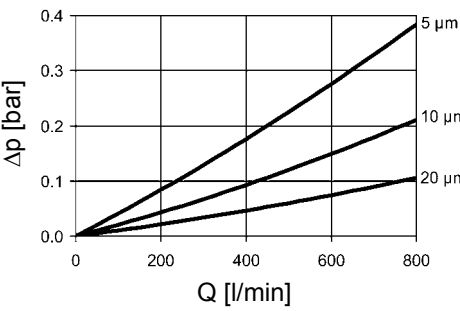

4. DIMENSIONS

RKMR 600 - 800 SET

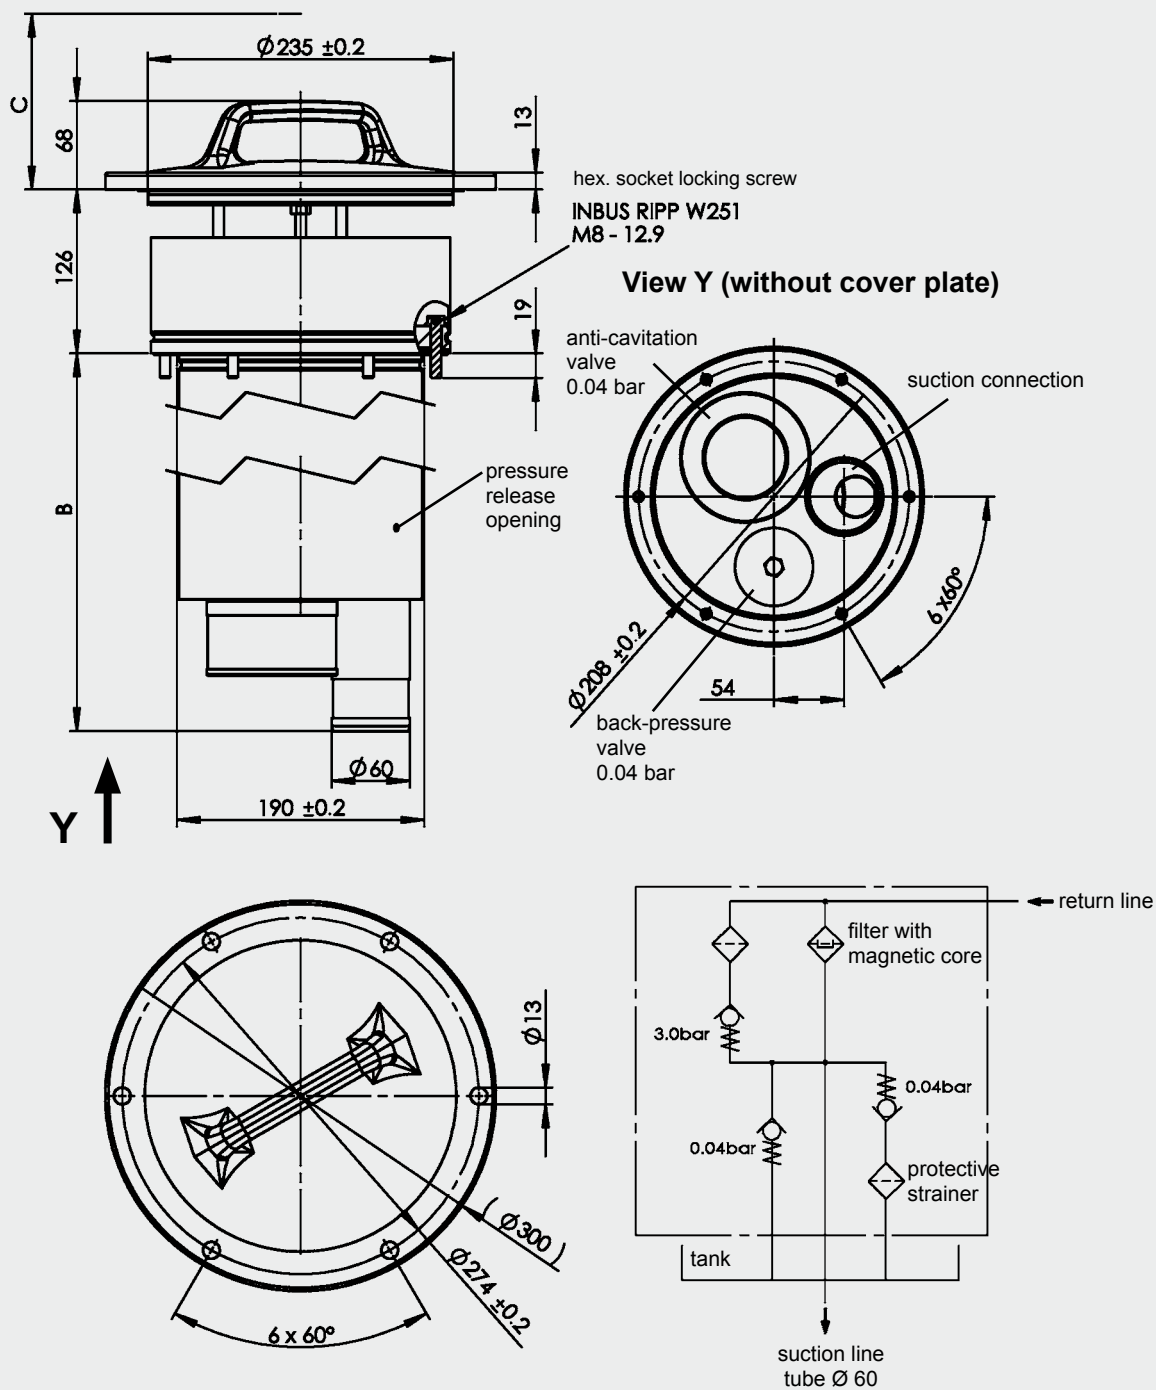

RKMR SET	B	C min.	Weight incl. element [kg]
600	695	570	29.4
800	807	685	32.4

NOTE

The information in this brochure relates to the operating conditions and applications described.

For applications or operating conditions not described, please contact the relevant technical department.

Subject to technical modifications.

HYDAC Filbertechnik GmbH
Industriegebiet
D-66280 Sulzbach/Saar
Tel.: 0 68 97 / 509-01
Fax: 0 68 97 / 509-300
Internet: www.hydac.com
E-Mail: filter@hydac.com