



Chicago Pneumatic




Impact Wrenches



Industrial Tools

**High-performance products.
Designed for you!**

Impact Wrench Features

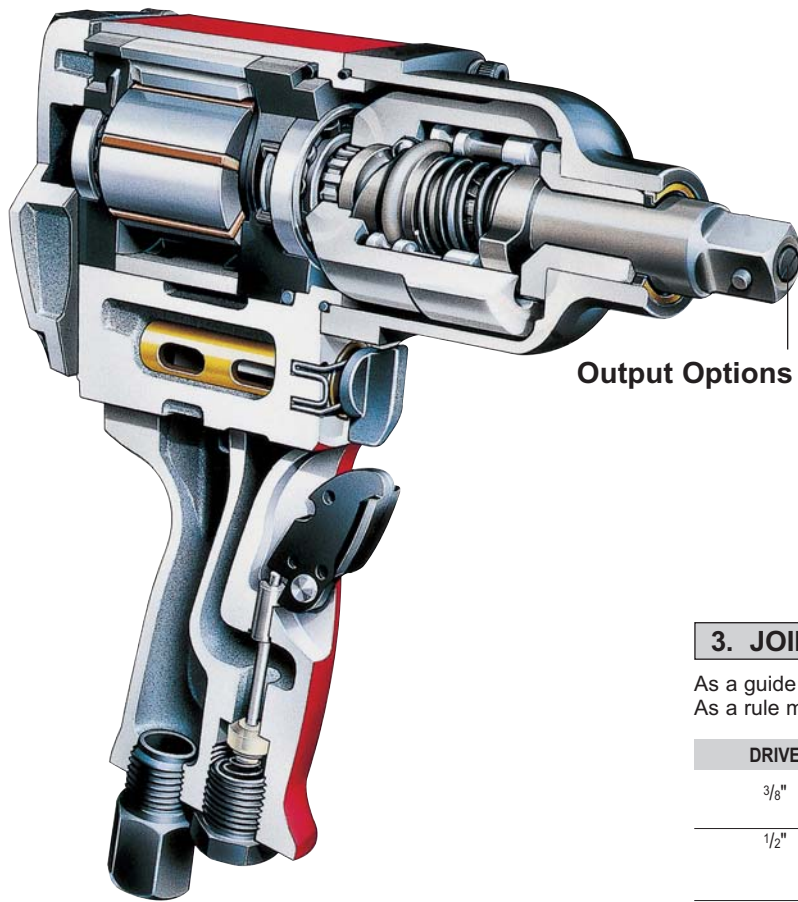

Output Options

Ease of service

Simple 3 piece construction for ease and speed of servicing.

Durable steel clutch housings (zinc option on some models).

Clutch Options

CP has developed a range of 7 clutch types to meet the differing demands of our customers applications. No single clutch is perfect for every type of joint.

2 or 3-Jaw - Good on soft or hard joints with high ultimate torques.

Rocking Dog - Good on very soft joints providing high speed rundown.

Single or Double Dog - For soft and hard joints. High power/weight ratio.

Twin Lobe - All round clutch with a high ultimate torque and high power to weight ratio.

Pin - Excellent on hard joints with a good power/weight ratio.

Tool Selection

1. APPLICATION TYPE

These tools are Heavy Duty and suitable for high production rates such as those on production/assembly lines, where high durability is used and the tools are used frequently.

Torque Controlled – Tool 'shuts off' at a predetermined torque with the added benefits of being able to eliminate some operator influence and be used for 2 or more torques.

2. BOLT SIZE/TORQUE

The table below lists the maximum torques for bolt sizes and different grade fasteners. These torque figures are for guidance only. Always confirm values with the bolt supplier/manufacturer.

BOLT SIZE	METRIC ISO 8.8	METRIC ISO 10.9	METRIC ISO 12.9	BOLT SIZE	SAE GRADE 1 & GRADE 2	SAE GRADE 5	ASTM-UNC GRADE 8/A490
mm	Nm	Nm	Nm	in.	ft lb	ft lb	ft lb
6	10.5	15	17	1/4	3	8	11
8	25	36	43	5/16	6	16	22
10	51	71	86	3/8	11	28	38
12	87	122	146	7/16	18	46	61
14	138	195	234	1/2	28	70	94
16	213	299	359	9/16	43	110	135
18	293	413	495	5/8	55	140	188
20	416	585	702	3/4	97	250	336
22	563	792	950	7/8	155	405	541
24	718	1011	1213	1	230	600	812
27	1060	1491	1789	1 1/8	340	770	1151
30	1440	2025	2430	1 1/4	480	1080	1626
33	1956	2751	3301	1 3/8	660	1470	2130
36	2517	3540	4248	1 1/2	860	1950	2830

3. JOINT TYPE

As a guide use the table to specify a tool for a certain joint. As a rule most joints are 'soft'.

DRIVE	VERY SOFT	SOFT	HARD
3/8"		CP6031 CP6300	CP6031 CP6300
1/2"		CP6041 CP6500 CP6540	CP6041 CP6500
3/4"		CP6060 CP6760	CP6060 CP6760
1"	CP0610	CP6110 CP0610 CP0611	CP6110 CP0610 CP0611
1 1/2"	CP0614	CP0614 CP6120	CP0614 CP6120

4. HANDLE TYPE



Pistol



D Handle
Outside Trigger




D Handle
Inside Trigger


5. SOCKET RETENTION




Pin Retainer
for infrequent socket change




Integral Spline
with integral push button retainer



Friction Ring
for rapid socket change



Quick Change
for screwdriver bits or torsion bars



Hole
for pin o-ring type retention

**Chicago
Pneumatic**


V.Soft	Soft	Hard	Torque Nm (lb.ft)	200	400	600	800	1000	1250	1500	2000	3000	4000	5000	
			1/2" Square Drive (cont.)												
			RP8252 / 53	300-800 (220-590)				1050 (775)							
			RP9545	34-542 (525-400)		746 (550)									
			RP9546	68-610 (50-450)				827 (625)							
			3/4" Square Drive												
			CP6060SASAB / SASAR	265-880 (195-650)				1350 (995)							
			RP8072 / 73 / 8272 / 74 / 75					135-1300 (100-960)		1650 (1217)					
			RP9560	200-950 (150-700)				1360 (1000)							
			RP9561	102-680 (75-500)				1020 (750)							
			1" Square Drive												
			CP6060 SASAK	265-880 (195-650)				1350 (995)							
			CP0610 GALED					270-1285 (200-950)		1830 (1350)					
			CP6110 GASED / PASED					510-1695 (375-1250)		2575 (1900)					
			CP0611 GASED / PASED / P RS					1220-2440 (900-1800)		3790 (2800)					
			CP6910 RS / RSE					1300-2400 (970-1785)		2800 (2083)					
			CP6920 PALED / E					1300-2400 (970-1785)		2800 (2083)					
			RP8084 / 85					135-1300 (100-960)		1650 (1217)					
			RP9582 / 83					200-1225 (150-900)		1900 (1400)					
			RP9597					405-1900 (300-1400)		2712 (2000)					
			#5 Spline Drive												
			CP0610 GALEL / PALEL					270-1285 (200-950)		1830 (1350)					
			CP6110 GASEL / PASEL					510-1695 (375-1250)		2575 (1900)					
			CP0611 GASEL / PASEL / R RS1					1220-2440 (900-1800)		3790 (2800)					
			CP6120 GASEL / PASEL							2710 (1997)		4740 (3500)			
			1 1/2" Drive												
			CP6120 GASED / PASED							2710 (1997)		4740 (3500)			
			CP0614 GALED / PALED							1620-3250 (1200-2400)		5420 (4000)			
			CP6930 PALED												

Coming Soon

Coming Soon

Impact Wrench

30 to 480 Nm (23 to 354 ft.lb)

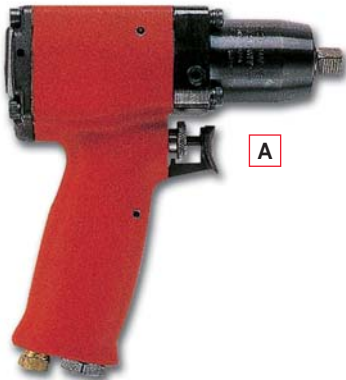

A



B



C




D



E

Model	A		Side to centre	
	mm	in.	mm	in.
CP6031 HABAD	143	5.63	25.4	1
CP6031 HABAK	143	5.63	25.4	1
CP6031 HABAV	146	5.75	25.4	1
CP6300 RSR	152	5.98	31.8	1.25
CP6041 HABAB	173	6.83	31.8	1.25
CP6041 HABAR	173	6.83	31.8	1.25
CP6500 RS	178	7.01	35.8	1.41
CP6500 RSR	178	7.01	35.8	1.41
CP6500 RSS	178	7.01	35.8	1.41
CP6540 RS	188	7.4	35.1	1.38
CP6540 RSR	188	7.4	35.1	1.38
CP6540 RSS	188	7.4	35.1	1.38



OPTIONAL ACCESSORIES

1/2" square drive with 50mm (2") extension, friction ring retainer

CP6500

CA148629

CP6500 - reverse torque 845Nm (625ft.lb)

Air inlet: 1/4" NPT

Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories.

PIC REF	MODEL	PART NUMBER	DRIVE	CLUTCH TYPE	HANDLE STYLE	BLOWS PER MINUTE	TORQUE WORKING		TORQUE MAX.		WEIGHT		AIR CONSUMPTION	
							Nm	ft lb	Nm	ft lb	kg	lb	l/s	cfm
A	CP6031 HABAD*	T021887	3/8"	2-Jaw	Pistol	2200	30-102	23-75	176	130	1.5	3.3	12.0	25
A	CP6031 HABAK*	T021884	1/2"	2-Jaw	Pistol	2200	30-102	23-75	176	130	1.5	3.3	12.0	25
A	CP6031 HABAV**	T021885	7/16" hex	2-Jaw	Pistol	2200	30-102	23-75	176	130	1.5	3.3	12.0	25
B	CP6300 RSR***	T025285	3/8"	Single-Dog	Pistol	1800	54-203	40-150	243	180	1.6	3.5	6.6	14
C	CP6041 HABAB*	T021888	1/2"	2-Jaw	Pistol	1700	55-339	40-250	509	375	2.80	6.2	18.9	40
C	CP6041 HABAR***	T022331	1/2"	2-Jaw	Pistol	1700	55-339	40-250	509	375	2.80	6.2	18.9	40
D	CP6500 RS*	T025214	1/2"	Double-Dog	Pistol	1320	140-480	103-354	710	525	2.65	5.8	11.8	25
D	CP6500 RSR***	T025216	1/2"	Double-Dog	Pistol	1320	140-480	103-354	710	525	2.65	5.8	11.8	25
D	CP6500 RSS**	T025215	7/16" hex	Double-Dog	Pistol	1320	140-480	103-354	710	525	2.65	5.8	11.8	25
E	CP6540 RS*	T025312	1/2"	Rocking-Dog	Pistol	1320	54-162	40-120	420	310	2.80	6.2	10.4	22
E	CP6540 RSR***	T025313	1/2"	Rocking-Dog	Pistol	1320	54-162	40-120	420	310	2.80	6.2	10.4	22
E	CP6540 RSS**	T025314	7/16" hex	Rocking-Dog	Pistol	1320	54-162	40-120	420	310	2.80	6.2	10.4	22

Socket Retainer: * Pin - ** Quick Change - *** Friction Ring

Impact Wrench


245 to 1695 Nm (180 to 1250 ft.lb)




A



B


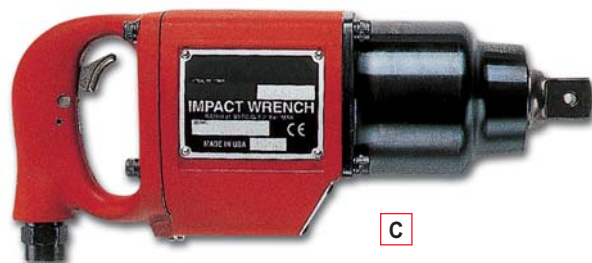


C

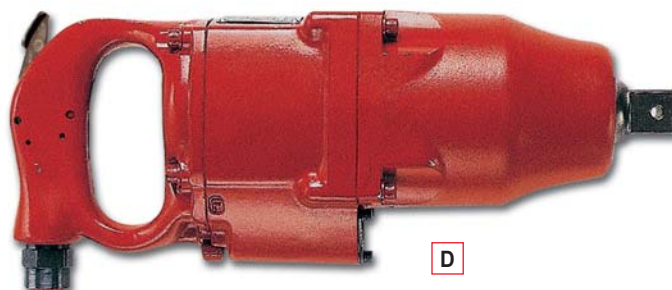

D

Model	A		Side to centre	
	mm	in.	mm	in.
CP6060 SASAB	194	7.64	45.2	1.78
CP6060 SASAK	194	7.64	45.2	1.78
CP6060 SASAR	194	7.64	45.2	1.78
CP6760 RS	230	9.05	45.7	1.8
CP6760 RS1	230	9.05	45.7	1.8
CP6760 RSR	230	9.05	45.7	1.8
CP6110 GASED	330	12.99	44.5	1.75
CP6110 GASEL	330	12.99	44.5	1.75
CP6110 PASED	330	12.99	44.5	1.75
CP0610 GALEL	343	13.5	54.1	2.13



ACCESSORIES INCLUDED

	CP0610	CP6110
• Support handle	C039423	C145892
• Support handle mount		C116388
• Support handle screws (4 off)		C127944
• Retainer ring (see page 132)		

Air Inlet: 3/8" NPT for A & B - 1/2" NPT for C & D


Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories.

PIC REF	MODEL	PART NUMBER	DRIVE	CLUTCH TYPE	HANDLE STYLE	BLOWS PER MINUTE	TORQUE WORKING		TORQUE MAX.		WEIGHT		AIR CONSUMPTION	
							Nm	ft lb	Nm	ft lb	kg	lb	l/s	cfm
A	CP6060 SASAB*	T024059	3/4"	2-Jaw	Pistol	1000	265-880	195-650	1350	995	5.3	11.7	19.8	42
A	CP6060 SASAK*	T024060	1"	2-Jaw	Pistol	1000	265-880	195-650	1350	995	5.4	11.9	19.8	42
A	CP6060 SASAR**	T024058	3/4"	2-Jaw	Pistol	1000	265-880	195-650	1350	995	5.4	11.9	19.8	42
B	CP6760 RS*	T025309	3/4"	2-Jaw	Pistol	1000	245-810	180-600	1250	925	5.1	11.2	19.3	41
B	CP6760 RS1*	T025311	1"	2-Jaw	Pistol	1000	245-810	180-600	1250	925	5.1	11.2	19.3	41
B	CP6760 RSR**	T025310	3/4"	2-Jaw	Pistol	1000	245-810	180-600	1250	925	5.1	11.2	19.3	41
C	CP6110 GASED*	T024425	1"	Twin Lobe	D Outside Trigger	960	510-1695	375-1250	2575	1900	9.75	21.5	25.0	53
C	CP6110 GASEL***	T024426	#5 Spline	Twin Lobe	D Outside Trigger	960	510-1695	375-1250	2575	1900	9.75	21.5	25.0	53
C	CP6110 PASED*	T025100	1"	Twin Lobe	D Inside Trigger	960	510-1695	375-1250	2575	1900	9.75	21.5	25.0	53
C	CP6110 PASEL***	T025101	#5 Spline	Twin Lobe	D Inside Trigger	960	510-1695	375-1250	2575	1900	9.75	21.5	25.0	53
D	CP0610 GALEL*	T018046	1"	3-Jaw	D Outside Trigger	825	270-1285	200-950	1830	1350	9.30	20.5	22.6	48
D	CP0610 GALEL***	T018041	#5 Spline	3-Jaw	D Outside Trigger	825	270-1285	200-950	1830	1350	9.30	20.5	22.6	48
D	CP0610 PALED*	T018253	1"	3-Jaw	D Inside Trigger	825	270-1285	200-950	1830	1350	9.30	20.5	22.6	48
D	CP0610 PALEL***	T018042	#5 Spline	3-Jaw	D Inside Trigger	825	270-1285	200-950	1830	1350	9.30	20.5	22.6	48

Socket Retainer: * Hole - ** Friction Ring - *** Integral

Impact Wrench


815 to 3250 (600 to 2400 ft.lb)

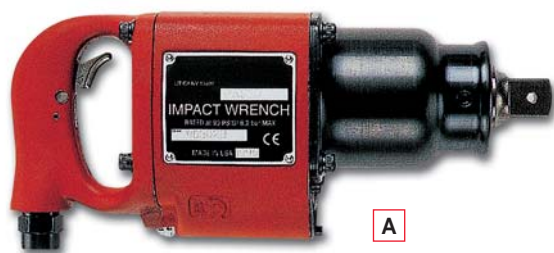

A



B


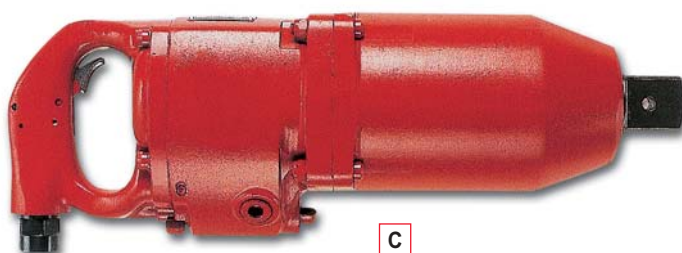


C



D

Model	A		Side to centre	
	mm	in.	mm	in.
CP0611 GASED	318	12.52	57.2	2.25
CP0611 GASEL	318	12.52	57.2	2.25
CP0611 PASED	318	12.52	57.2	2.25
CP0611 PASEL	318	12.52	57.2	2.25
CP6120 GASED	375	14.76	58.7	2.31
CP6120 GASEL	375	14.76	58.7	2.31
CP6120 PASED	375	14.76	58.7	2.31
CP6120 PASEL	375	14.76	58.7	2.31
CP0614 GASEL	417	16.42	61.0	2.4
CP0614 PASEL	417	16.42	61.0	2.4
CP0611P RS	272	10.7	55.0	2.13
CP0611P RLS	272	10.7	55.0	2.13



ACCESSORIES INCLUDED

	CP0611	CP0614	CP6120
• Support handle	CA048548	C039423	CA048548
• Support handle mount	C116388		C119061
• Support handle screws (4 off)	C064806		P073025
• Retainer ring (see page 132)			

Air inlet: 1/2" NPT

Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories.

PIC REF	MODEL	PART NUMBER	DRIVE	CLUTCH TYPE	HANDLE STYLE	BLOWS PER MINUTE	TORQUE WORKING		TORQUE MAX.		WEIGHT		AIR CONSUMPTION	
							Nm	ft lb	Nm	ft lb	kg	lb	l/s	cfm
A	CP0611 GASED*	T022580	1"	2-Jaw	D Outside Trigger	1020	1220-2440	900-1800	3790	2800	10.2	22.5	22.6	48
A	CP0611 GASEL**	T022581	#5 Spline	2-Jaw	D Outside Trigger	1020	1220-2440	900-1800	3790	2800	10.2	22.5	22.6	48
A	CP0611 PASED*	T022578	1"	2-Jaw	D Inside Trigger	1020	1220-2440	900-1800	3790	2800	10.2	22.5	22.6	48
A	CP0611 PASEL**	T022579	#5 Spline	2-Jaw	D Inside Trigger	1020	1220-2440	900-1800	3790	2800	10.2	22.5	22.6	48
B	CP6120 GASED*	T018237	1 1/2"	2-Jaw	D Outside Trigger	960	815-2710	600-2000	4740	3500	15.4	33.9	28.3	60
B	CP6120 GASEL**	T017755	#5 Spline	2-Jaw	D Outside Trigger	960	815-2710	600-2000	4740	3500	15.4	33.9	28.3	60
B	CP6120 PASED*	T018841	1 1/2"	2-Jaw	D Inside Trigger	960	815-2710	600-2000	4740	3500	15.4	33.9	28.3	60
B	CP6120 PASEL**	T018235	#5 Spline	2-Jaw	D Inside Trigger	960	815-2710	600-2000	4740	3500	15.4	33.9	28.3	60
C	CP0614 GASEL*	T020021	1 1/2"	2-Jaw	D Outside Trigger	500	1620-3250	1200-2400	5420	4000	14.3	31.5	27.4	58
C	CP0614 PASEL*	T020022	1 1/2"	2-Jaw	D Inside Trigger	500	1620-3250	1200-2400	5420	4000	14.3	31.5	27.4	58
D	CP0611P RS*	T025413	1"	2-Jaw	Pistol	1020	1220-2440	900-1800	3790	2800	10.5	23.1	22.6	48
D	CP0611P RLS**	T025414	#5 Spline	2-Jaw	Pistol	1020	1220-2440	900-1800	3790	2800	10.5	23.1	22.6	48

Socket Retainer: * Hole - ** Integral

NEW

Impact Wrench

1300 to 2800 Nm (970 to 2083 ft.lb)



A



B



C



D



E

Air Inlet: 1/2" NPT

Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories.

PIC REF	MODEL	PART NUMBER	DRIVE	HANDLE TYPE	BLOWS PER MINUTE	WORKING TORQUE FW*		TORQUE MAX. FW**		TORQUE MAX. REV**		FREE SPEED	WEIGHT		AIR CONSUMPTION	
						Nm	ft-lb	Nm	ft-lb	Nm	ft-lb	rpm	kg	lb	l/s***	cfm***
A	CP6910 RS	6151906910	1"	Pistol	600	1300-2400	970-1785	2800	2083	2800	2083	5000	10.5	23	35	74
B	CP6910 RSE	6151906911	1"	Pistol	600	1300-2400	970-1785	2800	2083	2800	2083	5000	12	26	35	74
C	CP6920 PALED	6151906920	1"	D Inside Trigger	630	1300-2400	970-1785	2800	2083	2800	2083	5000	10.5	23	35	74
D	CP6920 PALEDE	6151906921	1"	D Inside Trigger	630	1300-2400	970-1785	2800	2083	2800	2083	5000	12	26	35	74
E	CP6930	Coming Soon														





Coming Soon

* values at: 6,3 Bar - 4 sec.

** Values at: 6,3 Bar - 10 sec.

*** Values at free speed

Torque Controlled Accessories

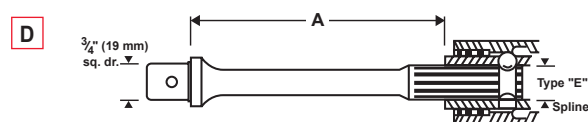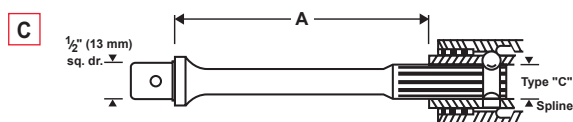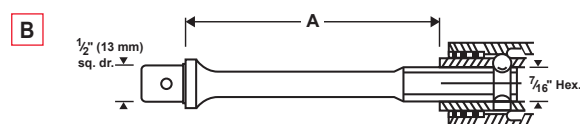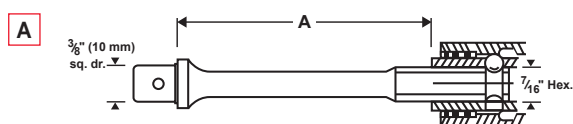

PIC REF	PART NUMBER	NOMINAL NUMBER	COLOUR	TORQUE RANGE		LENGTH 'A'	
				Nm	ft lb	mm	in.

7/16" HEX. DRIVE TORK BARS CP6031 TEBAV

A	C112301	1	Red	11-14	8-10	95	3 3/4"
A	C112302	2	Orange	14-16	10-12	95	3 3/4"
A	C112303	3	Yellow	16-20	12-15	95	3 3/4"
A	C112304	4	Green	20-24	15-18	95	3 3/4"
A	C112305	5	Blue	24-28	18-21	95	3 3/4"
A	C112306	6	Purple	28-33	21-24	95	3 3/4"
A	C112307	7	Red/White	33-37	24-27	95	3 3/4"

PIC REF	PART NUMBER	NUMBER	COLOUR	NOMINAL TORQUE RANGE SINGLE BLOW		LENGTH 'A'	
				Nm	ft lb	mm	in.

7/16" HEX. DRIVE TORK BARS CP6041 TEBAS

B	C113201	1	Red	20-27	15-20	110	4 5/16"
B	C113202	2	Orange	27-34	20-25	110	4 5/16"
B	C113203	3	Yellow	34-41	25-30	110	4 5/16"
B	C113204	4	Green	41-48	30-35	110	4 5/16"
B	C113205	5	Blue	48-54	35-40	110	4 5/16"
B	C113206	6	Purple	54-61	40-45	110	4 5/16"
B	C113207	7	Red/White	61-68	45-50	110	4 5/16"

PIC REF	PART NUMBER	NUMBER	COLOUR	NOMINAL TORQUE RANGE SINGLE BLOW		LENGTH 'A'	
				Nm	ft lb	mm	in.

TYPE 'C' SPLINE DRIVE TORK BARS CP6041 TEBAD

C	C051531	1	Red	20-27	15-20	106	4 3/16"
C	C051532	2	Orange	27-34	20-25	106	4 3/16"
C	C051533	3	Yellow	34-41	25-30	106	4 3/16"
C	C051534	4	Green	41-48	30-35	106	4 3/16"
C	C051535	5	Blue	48-54	35-40	106	4 3/16"
C	C051536	6	Purple	54-61	40-45	106	4 3/16"
C	C051537	7	Red/White	61-68	45-50	106	4 3/16"

PIC REF	PART NUMBER	NUMBER	COLOUR	NOMINAL TORQUE RANGE		LENGTH 'A'	
				Nm	ft lb	mm	in.

TYPE 'E' SPLINE DRIVE TORK BARS CP6060 TESAT

D	C059901	1	Red	136-149	100-110	141	5 9/16"
D	C059902	2	Orange	149-163	110-120	141	5 9/16"
D	C059903	3	Yellow	163-176	120-130	141	5 9/16"
D	C059904	4	Green	176-190	130-140	141	5 9/16"
D	C059905	5	Blue	190-203	140-150	141	5 9/16"
D	C059906	6	Purple	203-217	150-160	141	5 9/16"
D	C059907	7	Red/White	217-230	160-170	141	5 9/16"

Under normal working conditions a Tork Bar will hold a wrench's mean torque output within the limits listed. Under unusual work conditions it may be necessary to use a higher or lower rated bar to get desired torque. After selecting a bar for a specific job always check the selection by driving a few fasteners and measuring the torque delivered.

Torque Controlled Tools

18 to 405 Nm (13 to 300 ft.lb)



A



B



C

Methods of Torque Control



1. 'Close Coupled' Torque Control – socket attached directly to the output of the wrench

The torque control mechanism and speed adjustments are made by two screws located in the rear of the housing cap. The wrench shuts off automatically when the specified torque is reached. Correct torque setting is determined by testing on the joint to be assembled.

2. 'Quick Change Tork Bar' – CP6031 TEBAV, CP6041 TEBAD, CP6041 TEBAS, CP6060 TESAT

Simple substitution of the tork bar changes the torque output of the tool. The wrench shuts off automatically when the specified torque is reached. This solution should be used if 2 or more torques are required from the same tool.

Model	A		Side to centre	
	mm	in.	mm	in.
CP6031 TEBAK	159	6.25	34.9	2.31
CP6031 TEBAV	191	7.0	34.9	2.31
CP6041 TEBAB	211	8.3	31.8	1.25
CP6041 TEBAD	244	9.6	31.8	1.25
CP6041 TEBAS	244	9.6	31.8	1.25
CP6060 TESAB	240	8.3	50.8	2.0
CP6060 TELUD	391	15.4	54.0	2.12



ACCESSORIES INCLUDED

- Support handle
- Retainer ring (see page 132)

CP0610

C039423

The Quick Change models require a Tork bar:

Order as a separate line any Tork bar from the appropriate table on page 118

CP0610-T – Lock out feature to override the shut-off, for 'turn of the nut' fastening.

Air inlet: 1/4" NPT for A & B - 1/2" NPT for C

Torque ranges should be used as a guide only. Final torque will depend on the joint, operating pressure and drive accessories.

PIC REF	MODEL	PART NUMBER	DRIVE	CLUTCH TYPE	HANDLE STYLE	BLOWS PER MINUTE	TORQUE MIN.		TORQUE MAX.		WEIGHT		AIR CONSUMPTION	
							Nm	ft lb	Nm	ft lb	kg	lb	l/s	cfm
A	CP6031 TEBAK*	T021951	1/2"	2-Jaw	Pistol	2200	18	13	54	40	1.6	3.5	11.8	25
A	CP6031 TEBAV**	T021952	7/16" hex	2-Jaw	Pistol	2200	27	20	47	35	1.7	3.7	11.8	25
B	CP6041 TEBAB*	T021953	1/2"	2-Jaw	Pistol	1700	41	30	129	95	3.0	6.6	18.9	40
B	CP6041 TEBAD**	T021954	C Spline	2-Jaw	Pistol	1700	34	25	95	70	3.1	6.8	18.9	40
B	CP6041 TEBAS**	T021955	7/16" hex	2-Jaw	Pistol	1700	48	35	115	85	3.1	6.8	18.9	40
B	CP6060 TESAB***	T024176	3/4"	2-Jaw	Pistol	1000	169	125	529	390	6.0	13.2	27.8	59
B	CP6060 TESAT**	T021604	E Spline	2-Jaw	Pistol	1000	136	100	339	250	6.0	13.2	27.8	59
B	CP6060 TESAK***	T021606	1"	2-Jaw	Pistol	1000	170	125	529	390	6.0	13.2	27.8	59
C	CP0610 TELUD***	T018056	1"	3-Jaw	D Outside	630	405	300	810	600	10.4	22.9	27.8	59
C	CP0610 TELUL****	T018044	#5 Spline	3-Jaw	D Outside	630	405	300	810	600	10.4	22.9	27.8	59

Socket Retainer: * Pin - ** Quick Change - *** Hole - **** Integral

Impact Wrenches - General Duty



RP9524

3/8" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8222	615 190 8222	3/8	11,500	250-400	184-295	450	331	15.0	32	177	6.96	1.15	2.53	89	100	3.9
RP9521	615 190 9521	3/8	11,000	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	2.6	84	95	4.9
RP9522	615 190 9522	3/8	9,500	6.8-70	5-50	122	90	4.7	10	146	5.75	0.9	2.0	86	97	2.6
RP9523	615 190 9523	3/8	11,000	6.8-70	5-50	122	90	4.7	10	146	5.75	1.2	2.6	84	95	4.9
RP9524	615 190 9524	3/8	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9525	615 190 9525	3/8	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5

All models - Air inlet (NPTF) 1/4". Friction ring retainer (unless otherwise specified).



RP8252

1/2" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8242	615 190 8242	1/2	11,500	250-400	184-295	650	479	15.0	32	177	6.96	1.2	2.6	89	100	3.9
RP8252	615 190 8252	1/2	9,000	300-800	220-590	1050	775	13.6	29	200	7.87	2.0	4.4	94	105	7.9
RP8253 Ext 2"	615 190 8253	1/2	9,000	300-800	220-590	1050	775	13.6	29	262	10.31	2.1	4.7	94	105	7.9
RP9526	615 190 9526	1/2	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9527	615 190 9527	1/2	8,500	27-217	20-160	272	200	5.7	12	152	6.0	1.4	3.1	94	105	<2.5
RP9540-B	615 190 2540	1/2	8,400	34-420	25-310	576	425	7.1	15	191	7.5	2.3	5.1	94	105	3.4
RP9541	615 190 9541	1/2	8,900	34-434	25-320	603	445	6.6	14	168	6.6	2.5	5.5	89	100	2.7
RP9542	615 190 9542	1/2	8,900	34-434	25-320	603	445	6.6	14	168	6.6	2.5	5.5	89	100	2.7
RP9543 HEX	615 190 9543	7/16	8,900	34-434	25-320	603	445	6.6	14	199	7.8	2.6	5.8	89	100	2.7
RP9545	615 190 9545	1/2	6,900	34-542	25-400	746	550	9.0	19	180	7.1	2.5	5.6	96	107	4.0
RP9546	615 190 9546	1/2	6,400	68-610	50-450	827	625	2.6	5.5	178	7.0	2.49	5.5	95	106	4.9

All models - Air inlet (NPTF) 1/4". Most 1/2" models - Friction Ring



RP8242 MKIT - Metric - Included:
Part number: **615 190 8249**
- 1/2" Impact wrench RP8242 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9546 IKIT - Imperial - Included:
Part number: **615 190 8546**
- 1/2" Impact wrench RP9546 (Qty 1)
- Sockets (5) - 1/2", 5/8", 3/4", 7/8" & 5/16" AF
- Bottle of air tool oil



RP8252 MKIT - Metric - Included:
Part number: **615 190 8259**
- 1/2" Impact wrench RP8252 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9550-B IKIT - Imperial - Included:
Part number: **615 190 8550**
- 1/2" Impact wrench RP9550-B (Qty 1)
- Sockets (5) - 1/2", 5/8", 3/4", 7/8" & 5/16" AF

RP9546 MKIT - Metric - Included:
Part number: **615 190 0546**
- 1/2" Impact wrench RP9546 (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF
- Bottle of air tool oil

RP9552-B MKIT - Metric - Included:
Part number: **615 190 8552**
- 1/2" Impact wrench RP9552-B (Qty 1)
- Sockets (5) - 14, 16, 17, 19 & 22mm AF



RP9545

3/4" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²
RP8072	615 190 8072	3/4	6,500	135-1300	100-960	1650	1217	17	36	230	9.05	4.85	10.7	94	100	3.9
RP8073 Ext 6"	615 190 8073	3/4	6,500	135-1300	100-960	1650	1217	17	36	387	15.2	5.85	12.9	94	105	9.0
RP8272	615 190 8272	3/4	6,500	135-1300	100-960	1650	1217	23	48	230	9.05	3.25	7.16	96	107	9.0
RP8274	615 190 8274	3/4	6,500	135-1300	100-960	1650	1217	23	48	230	9.05	3.25	7.16	96	107	9.0
RP8275 Ext 6"	615 190 8275	3/4	6,500	135-1300	100-960	1650	1217	23	48	382	15	3.88	8.55	96	107	9.0
RP9560	615 190 9560	3/4	4,200	200-950	150-700	1360	1000	11.3	24	244	9.6	4.80	10.5	99	110	4.9
RP9561	615 190 9561	3/4	5,500	102-680	75-500	1020	750	14.1	30	216	8.5	4.80	10.5	100	111	5.1

All models - Air inlet (NPTF) 3/8". Ext. 6" Models - Hole + Friction Ring retainer combo.



RP8272 MKIT - Metric - Included:
Part number: **615 190 8279**
- 3/4" Impact wrench RP8272 (Qty 1)
- Sockets (4) - 24, 27, 30 & 32 mm AF
- Bottle of air tool oil

RP9551 IKIT - Imperial - Included:
Part number: **615 190 9551**
- 3/4" Impact wrench RP9551 (Qty 1)
- Sockets (4) - 15/16", 1", 1-1/16" & 1-1/8" AF

RP9553 MKIT - Metric - Included:
Part number: **615 190 9553**
- 3/4" Impact wrench RP9553 (Qty 1)
- Sockets (4) - 24, 27, 30 & 32 mm AF



RP8072

1" Square drive

MODEL	PART NUMBER	SQUARE DRIVE	FREE SPEED	WORKING TORQUE		MAXIMUM TORQUE		AIR CONSUMPTION		OVERALL LENGTH		NET WEIGHT		NOISE LEVEL	SOUND POWER	VIBRATION	AIR INLET
		in.	rpm	Nm	ft lb	Nm	ft lb	l/s	cfm	mm	in.	kg	lb	dB(A)	dB(A)	m/s ²	NPTF
RP8084	615 190 8084	1	6,500	135-1300	100-960	1650	1217	17	36	230	9.05	5.05	11.13	94	105	9.0	3/8"
RP8085 Ext 6"	615 190 8085	1	6,500	135-1300	100-960	1650	1217	17	36	387	15.2	5.90	13.0	94	105	9.0	3/8"
RP9582	615 190 9582	1	4,200	200-1225	150-900	1900	1400	18.9	40	394	15.5	12.3	27.0	110	121	4.3	1/2"
RP9583 Ext 6"	615 190 9583	1	4,200	200-1225	150-900	1900	1400	18.9	40	564	22.2	13.5	29.8	110	121	4.3	1/2"
RP9597	615 190 9597	1	4,700	407-1898	300-1400	2712	2000	22.7	48	241	9.50	9.10	20.0	101	112	13.0	1/2"

Most 1" models - Hole + Friction Ring retainer combo.



RP9582



**Chicago
Pneumatic**


Accessories



Socket sets



For complete information, please refer to our Impact Sockets catalogue.

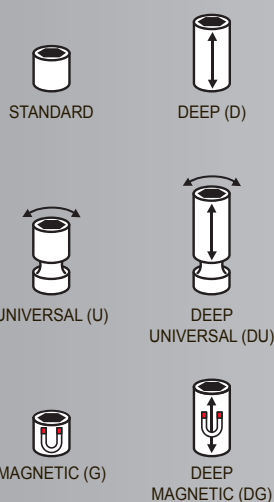

PART NUMBER	# OF PIECES	CONTENT
SS2114	14	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2114D	14	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112U	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112G	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS2112DG	12	5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14 & 15mm
SS3113	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113D	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3110U	10	10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3110DU	10	10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113G	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS3113DG	13	7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 & 19mm
SS4114	14	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27mm
SS4114D	14	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 & 27mm
SS4113U	13	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24mm
SS4113DU	13	12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23 & 24mm
SS4112G	12	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21mm
SS4112DG	12	10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20 & 21mm
SS618	8	26, 27, 29, 30, 32, 35, 36 & 38mm
SS618D	8	26, 27, 29, 30, 32, 35, 36 & 38mm
SS818	8	27, 30, 32, 33, 35, 36, 38 & 41mm
SS814D	4	27, 30, 32, 33 & 36mm
SS818D	8	27, 30, 32, 33, 35, 36, 38 & 41mm

SQUARE DRIVE (")





www.cp.com



Please find your local contact at: [**www.cp.com**](http://www.cp.com)

