



STANDARD PRODUCT CATALOG



THOMAS
A Gardner Denver Product

Pumps and Compressor Solutions for OEMs Worldwide

As the longtime leader in pressure and vacuum products for the OEM market, Thomas draws on nearly 50 years of technological strength. The knowledge gained working with literally thousands of customers and applications, coupled with our unmatched investments in research and development, combine to make Thomas a unique resource for OEMs the world over.

Standard Products

Within this catalog you will find detailed specifications for hundreds of standard Thomas products. It is a scope unmatched by any other company in the pressure and vacuum business. Given this, it may seem surprising that a majority of the pumps and compressors sold by Thomas are not standard at all. Instead, they are typically customized to meet application requirements for envelope size, mountings, electrical connections, service life, output characteristics, and more.

Think of Thomas standard products, then, not only as the top-quality, pre-engineered solutions they are – but also as proven platforms from which an ideal pressure or vacuum solution can be quickly and efficiently designed, prototyped and manufactured to meet your exact needs.

Pressure – The pressure spectrum ranges from .03 in.HG (1 mbar) up to 435 psi (30 bar). Six operating principles are utilized in covering a multitude of OEM applications.

Vacuum – The vacuum spectrum ranges from 29.6 in.HG (990 mbar). Six operating principles are utilized in covering a multitude of OEM applications.

Liquid – Applied operating principles: diaphragm (motor or linear drive), peristaltic (direct or gear drive), rotary vane.
Free flow: 1.31 lpm (max)
Suction height: 8.0 m H₂O (max)
Pressure height: 50 m H₂O (max)





Table Of Contents

Technology Selection Guide	4
WOB-L® Pumps & Compressors	8
Articulated Piston Compressors	14
Linear Pumps & Compressors	16
Diaphragm Pumps & Compressors	18
Rotary Pumps & Compressors	22
Tank Mounted Pumps & Compressors	24
Liquid Pumps	26

Technology Selection Guide

OPERATING PRINCIPLES



Dry running WOB-L® piston pump. Best performance characteristics for high pressures. Mainly used as a compressor.

Volume flow: 6.35 cfm (180 lpm) max.
Pressure: 160 psi (11 bar) max.




Dry running piston pump. Well suited for applications requiring high pressures. Mainly used as a compressor.

Volume flow: 9.8 cfm (227 lpm) max.
Pressure: 175 psi (12 bar) max.



Dry running and self-lubricating rotary vane pump. Low vibration, nearly pulsation free, compact and in some cases reversible. Mainly used as a vacuum pump.

Volume flow: 21.00 cfm (595 lpm) max.
Pressure: 23 psi (1.6 bar) max.
Typical end vacuum: 26.0 in. HG (-878 mbar)



Dry running diaphragm pump. Two different means of actuation: linear and vibrating armature. Very high life time, low noise level, and high efficiency. Used as a vacuum and pressure pump.

Volume flow: 9.55 cfm (270 lpm) max.
Pressure: 3.5 psi (.24 bar) max.
Vacuum: 7.0 in. HG (-236 mbar)



Dry running diaphragm pump. Characterized by a high efficiency, low noise level and good tightness. Adapts well to different gases. Used equally as a compressor and vacuum pump.

Volume flow: 3.12 cfm (88 lpm) max.
Pressure: 41 psi (2.8 bar) max.
End vacuum: 75 Torr (10 mbar abs)





Applied operating principles: diaphragm (motor or linear drive), peristaltic (direct or gear drive), rotary vane.


Free flow: 1.3 lpm max.
Suction height: 8.0m H₂O max.
Pressure height: 50m H₂O max.




Model Selection Guide

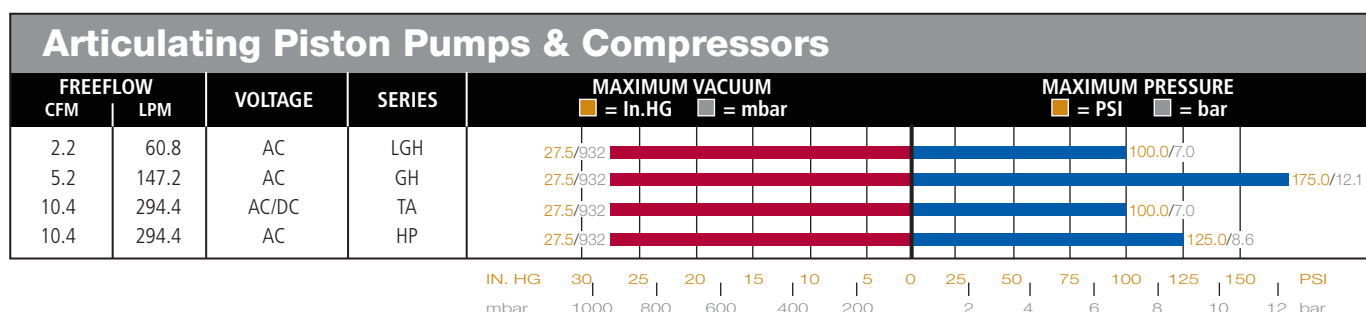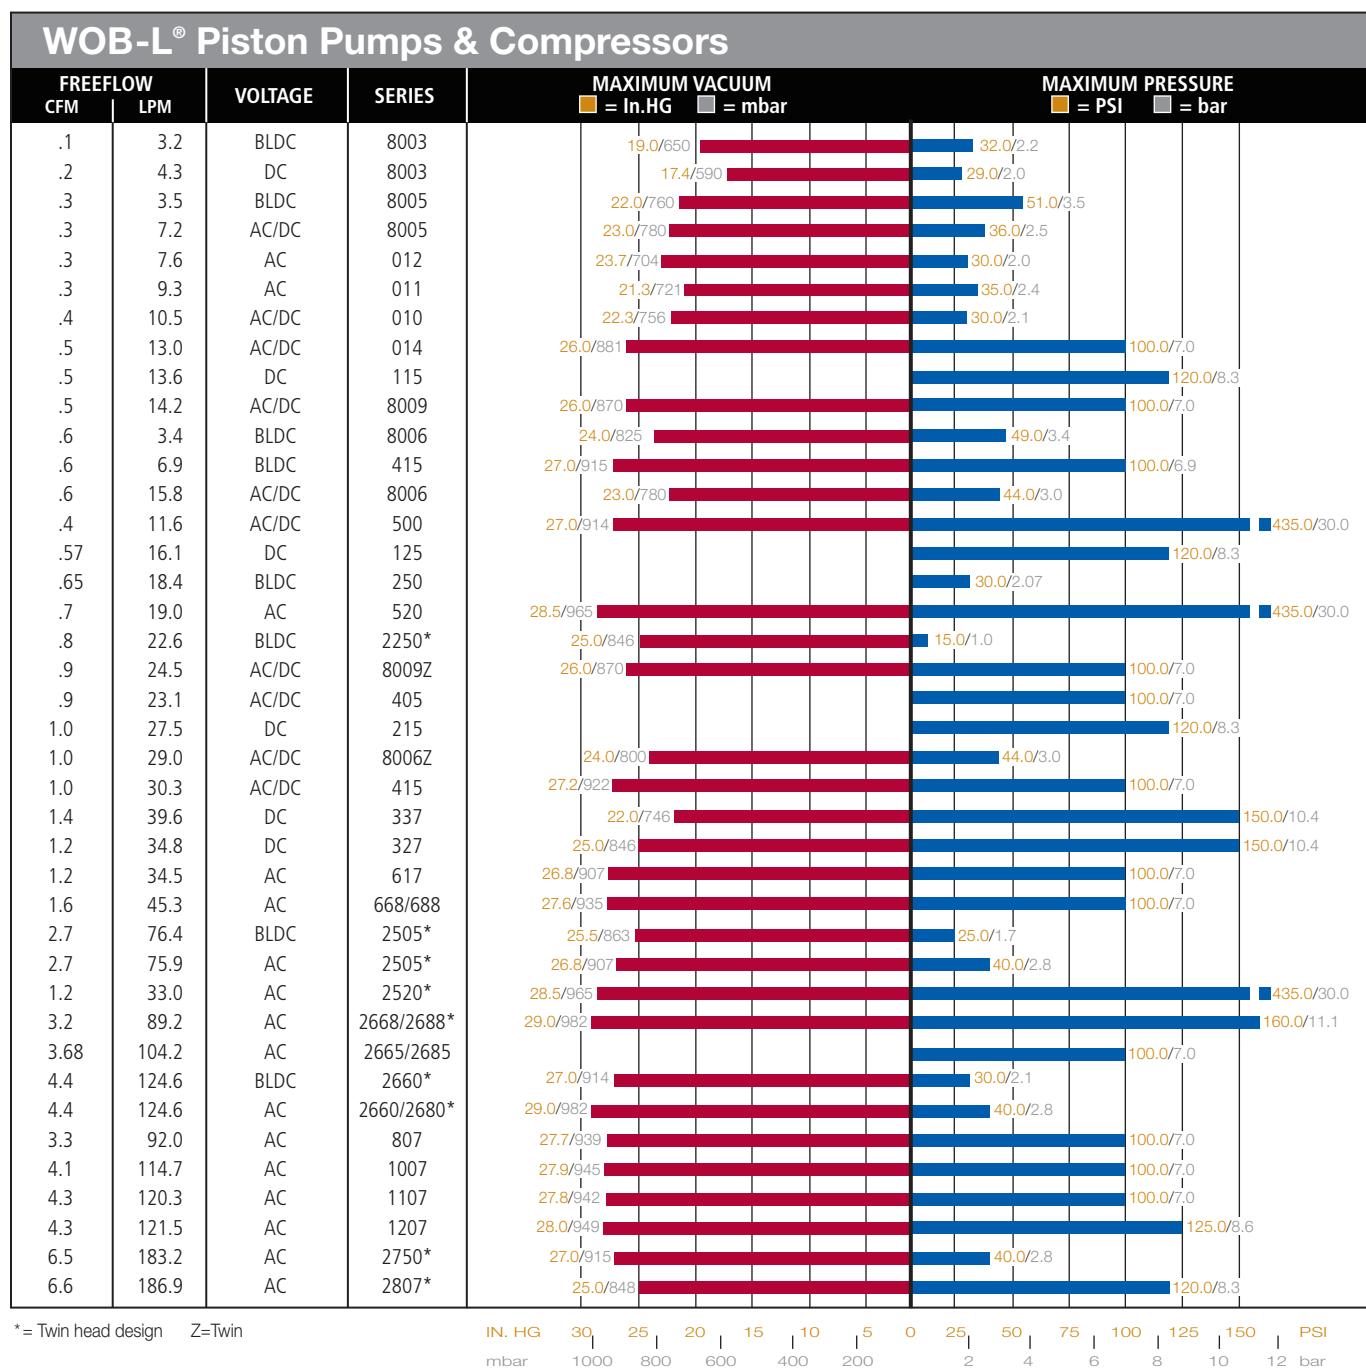


Rotary Pumps & Compressors

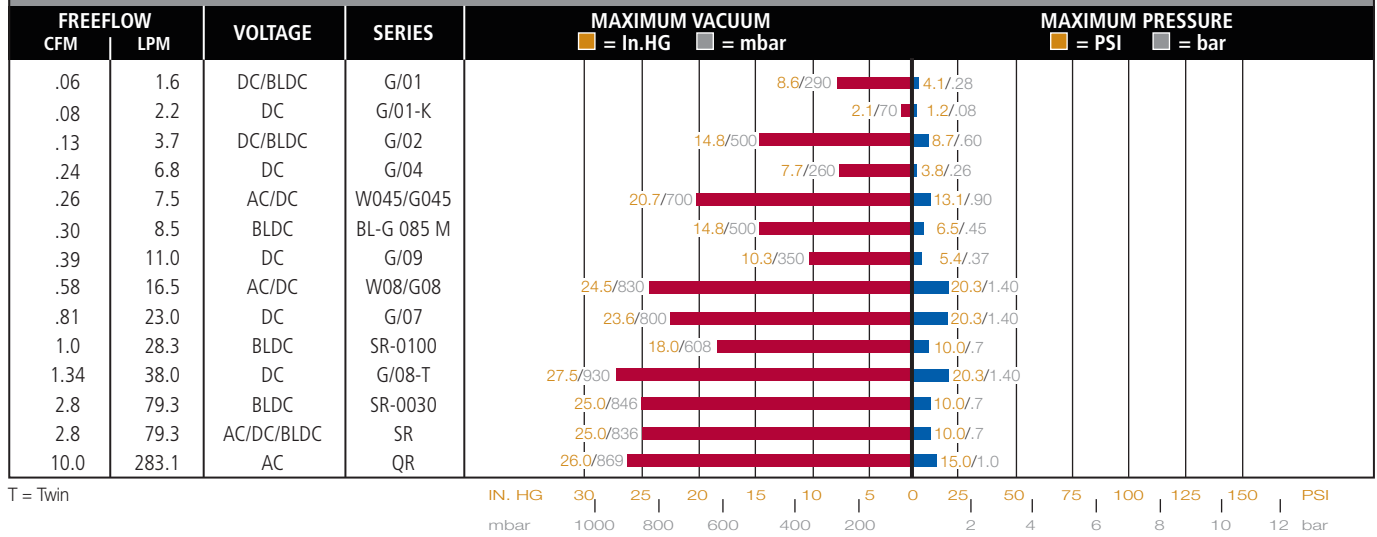

Linear Pumps & Compressors

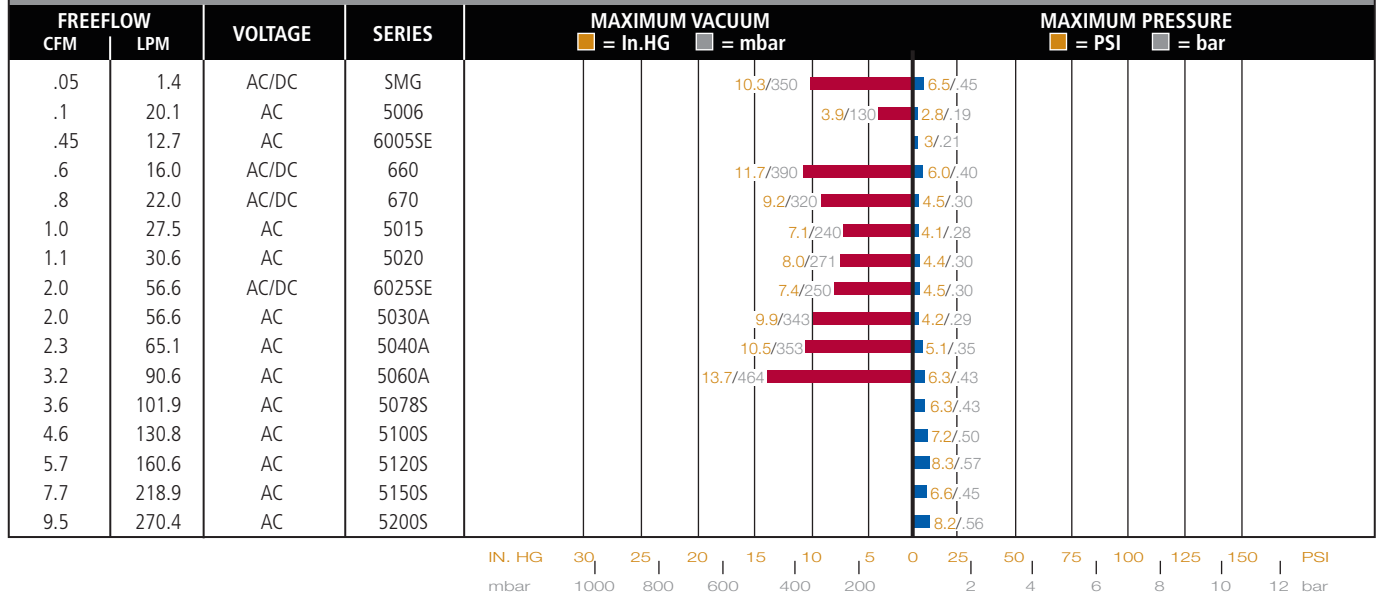


Diaphragm Pumps & Compressors

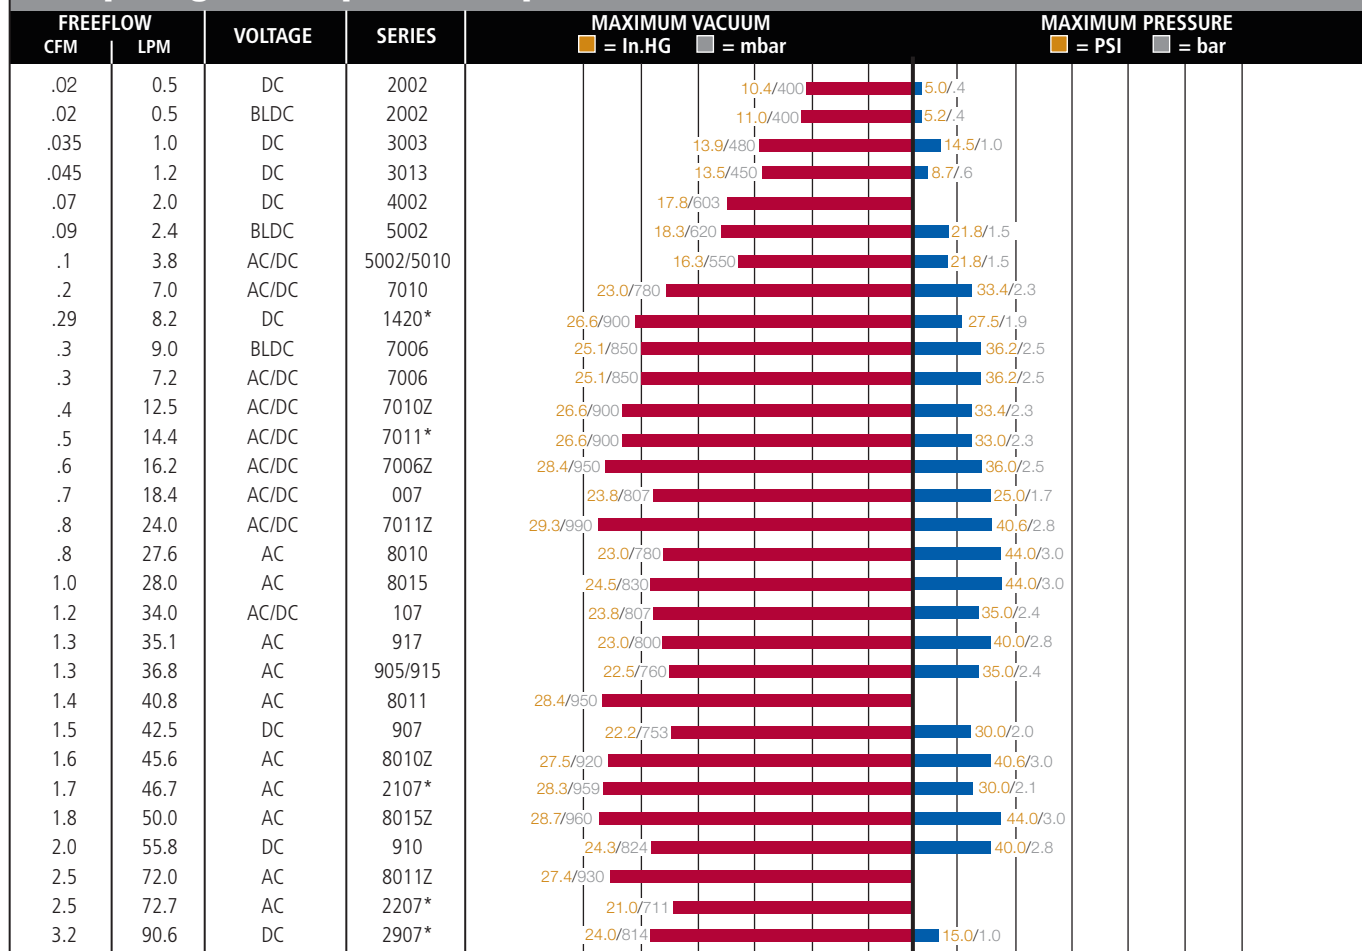

* = Twin head design Z=Twin


IN. HG 30 25 20 15 10 5 0 25 50 75 100 125 150 PSI
mbar 1000 800 600 400 200 2 4 6 8 10 12 bar

Liquid Diaphragm

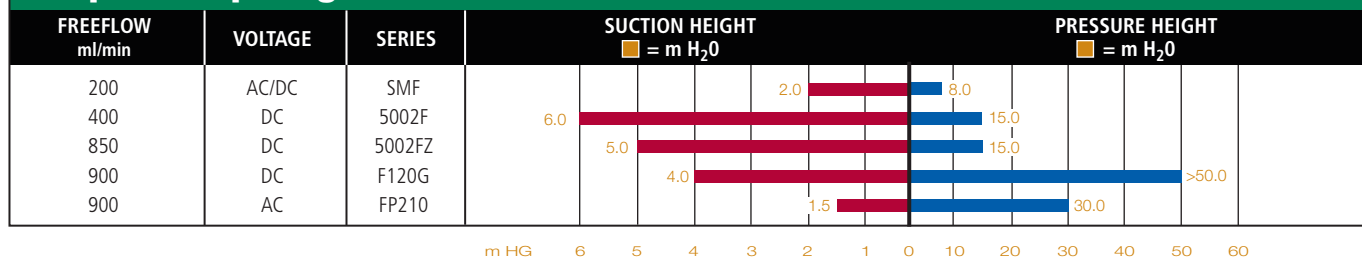

m HG 6 5 4 3 2 1 0 10 20 30 40 50 60

Liquid Peristaltic & Rotary Vane Pumps

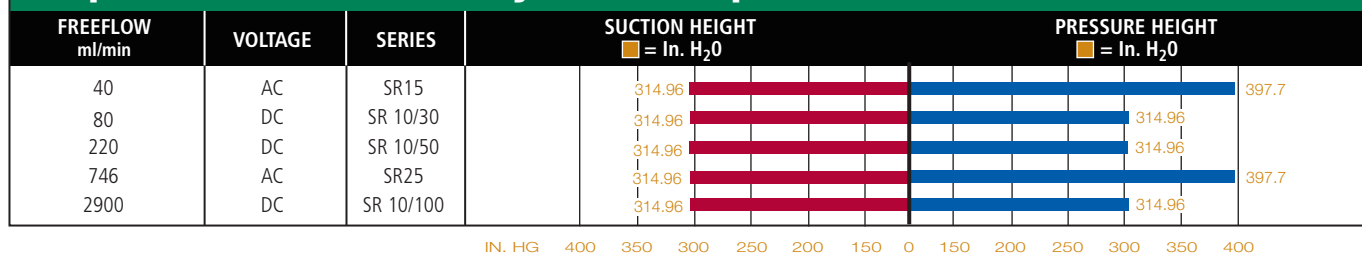

IN. HG 400 350 300 250 200 150 0 150 200 250 300 350 400

Performance and Specifications

WOB-L® Piston Pumps & Compressors

8003 DC




8005 DC



010



014



8006 DC



8009 DC



010DC



Pressure

MODEL SERIES	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (LPM @ PSI)								MAXIMUM PRESSURE (PSI)		
		VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
8003-0052	—	6v	PM	3.0	2.3	1.6	0.9	—	—	—	—	11	29	11
8003-0055	—	12v	PM	3.0	2.3	1.6	0.9	—	—	—	—	11	29	11
8005-0077	—	12v	PM	7.2	6.1	5.1	3.6	—	—	—	—	22	36	33
8006-0071	—	12v	PM	15.8	13.0	10.4	7.5	3.0	—	—	—	14.5	43.5	1.45
8009-1020	—	12v	PM	12.7	10.2	9.0	7.5	5.3	3.8	3.0	2.0	17.4	134.1	8.7
8009-1032	—	24v	PM	12.7	10.2	9.0	7.5	5.3	3.8	3.0	2.0	17.4	134.1	8.7
010CD26	—	220/50	SP	8.8	7.4	6.3	3.3	—	—	—	—	10	30	0
010CA26	—	115/60	SP	10.5	8.8	7.4	4.1	—	—	—	—	10	30	0
010CDC26/12	—	12v	PM	10.5	8.8	7.4	4.1	—	—	—	—	10	30	30
014CDC20/12	—	12v	PM	11.0	9.7	8.4	6.9	5.2	—	—	—	20	50	50
014CA28	—	115/60	SP	13.0	12.1	11.2	9.8	8.0	5.0	—	—	100	100	0

Vacuum

MODEL SERIES	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (LPM @ IN.HG.)						VACUUM (IN.HG.)	
		VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
8003-0064	—	6v	PM	3.0	1.7	1.1	.3	—	—	17.4	17.4
8003-0068	—	12v	PM	3.0	1.7	1.1	.3	—	—	17.4	17.4
8005-0039	—	12v	PM	7.2	5.3	3.5	2.1	—	—	23.0	23.0
8006-1068	—	12v	PM	15.8	12.1	7.9	4.4	2.1	—	23.6	3.0
010CD26	—	220/50	SP	8.8	7.4	6.2	3.8	1.5	—	22.3	0
010CA26	—	115/60	SP	10.5	9.0	7.5	4.6	2.0	—	22.3	0
010CDC26/12	—	12v	PM	10.5	8.8	7.2	4.3	1.6	—	22.3	22.3
014CDC20/12	—	12v	PM	11.0	8.5	6.5	4.9	2.5	—	25.0	25.3
014CA28	—	115/60	SP	13.0	11.5	10.0	7.0	3.8	—	25.0	0

WOB-L® Piston Pumps & Compressors

Pressure

MODEL SERIES	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
		VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
115ADC56/12	1/15	12v	PM	.48	.44	.39	.36	.29	.25	.21	.16	N/A	120	120
125ADC56/12	1/15	12v	PM	.57	.54	.51	.45	.35	.29	.24	.16	N/A	120	120
215ADC38/12	1/6	12v	PM	.97	.92	.87	.76	.61	.46	.38	.30	N/A	120	120
307CDC56/12	1/5	12v	PM	.81	.78	.75	.69	.60	.53	.46	.40	N/A	150	150
327CDC40/12	1/5	12v	PM	1.12	1.09	1.06	.94	.81	.66	.57	.49	N/A	150	150
337CDC56/12	1/5	12v	PM	1.15	1.18	1.08	1.0	.88	.78	.70	.61	N/A	150	150
405AD38	1/20	220/50	SP	.20	.20	.20	.16	.11	—	—	—	20	40	0
405AA38	1/20	115/60	SP	.32	.29	.27	.24	.17	—	—	—	20	40	0
405ADC38/12	1/10	12v	PM	.79	.75	.71	.63	.50	.38	.33	.24	100	100	100
415CDC30/12	1/10	12v	PM	.92	.86	.81	.71	.55	.44	.34	.25	100	100	100
617CD22	1/8	220/50	SP	.69	.64	.59	.50	.35	.25	.17	.10	100	100	0
617CA22	1/8	115/60	SP	.78	.74	.69	.59	.42	.31	.18	.07	100	100	0

Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
8003-0052	50° F	104° F	1.4	8.5	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.2
8003-0055	50° F	104° F	0.7	8.5	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.2
8005-0077	50° F	104° F	2.4	32	N/A	E	3500	NO	2.4	2.8 x 3.8 x 4.6
8006-0071	50° F	104° F	3.8	46	N/A	E	2800	NO	2.6	4.0 x 2.7 x 5.7
8009-1020	50° F	104° F	3.8	46	N/A	E	2800	NO	2.4	4.1 x 2.5 x 5.0
8009-1032	50° F	104° F	1.9	46	N/A	E	2800	NO	2.4	4.1 x 2.5 x 5.0
010CD26	50° F	104° F	0.7	70	.9	B	2500	YES	3.2	4.25 x 3.00 x 5.64
010CA26	50° F	104° F	1.3	85	2.1	B	3000	YES	3.2	4.25 x 3.00 x 5.64
010CDC26/12	50° F	104° F	2.5	N/A	6.7	B	3000	NO	1.6	4.01 x 2.45 x 5.17
014CDC20/12	50° F	104° F	3.0	N/A	8.0	B	2600	NO	2.3	4.13 x 1.90 x 4.40
014CA28	50° F	104° F	2.4	140	3.4	B	3200	YES	4.7	5.06 x 4.50 x 5.89



125



115



014DC



215



307/327/337



405DC



415DC

Vacuum										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
8003-0064	50° F	104° F	1.0	6	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.2
8003-0068	50° F	104° F	0.5	6	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.2
8005-0039	50° F	104° F	2.4	26	N/A	E	3500	NO	2.4	2.8 x 3.8 x 4.6
8006-1068	50° F	104° F	3.3	39	N/A	E	2800	NO	2.6	4.0 x 2.7 x 5.7
010CD26	50° F	104° F	0.7	70	.9	B	2500	YES	3.2	4.25 x 3.00 x 5.64
010CA26	50° F	104° F	1.3	85	2.1	B	3000	YES	3.2	4.25 x 3.00 x 5.64
010CDC26/12	50° F	104° F	2.5	N/A	6.7	B	3000	NO	1.6	4.01 x 2.45 x 5.17
014CDC20/12	50° F	104° F	3.0	N/A	8.0	B	2600	NO	2.3	4.13 x 1.90 x 4.40
014CA28	50° F	104° F	2.4	140	3.4	B	3200	YES	4.7	5.06 x 4.50 x 5.89

Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
115ADC56/12	-22° F	158° F	9.0	N/A	32.0	B	4000	NO	1.6	5.12 x 1.64 x 5.22
125ADC56/12	-22° F	149° F	9.0	N/A	28.0	B	3700	NO	1.8	4.88 x 1.87 x 5.20
215ADC38/12	-40° F	158° F	16.0	N/A	50.0	B	3650	NO	3.0	4.46 x 2.10 x 6.20
307CDC56/12	-40° F	158° F	13.7	N/A	71.0	B	2300	YES	6.0	6.14 x 4.00 x 7.65
327CDC40/12	-40° F	158° F	16.5	N/A	110.0	B	3100	YES	6.1	6.14 x 4.00 x 7.65
337CDC56/12	-40° F	158° F	19.6	N/A	116.0	B	3200	YES	6.5	6.14 x 4.00 x 8.37
405AD38	50° F	104° F	1.0	120	1.00	A	1175	YES	5.5	5.30 x 4.25 x 6.72
405AA38	50° F	104° F	1.65	110	2.55	A	1575	YES	5.5	5.30 x 4.25 x 6.72
405ADC38/12	50° F	104° F	10.5	N/A	25.0	A	3310	YES	4.3	5.30 x 4.25 x 7.26
415CDC30/12	50° F	104° F	10.2	N/A	42.0	A	3846	YES	5.0	5.34 x 4.25 x 7.26
617CD22	50° F	104° F	1.3	174	2.1	B	1105	YES	11.0	6.78 x 5.00 x 8.10
617CA22	50° F	104° F	3.1	189	5.5	B	1540	YES	11.0	6.78 x 5.00 x 8.10

continued →

WOB-L® Piston Pumps & Compressors continued

250



688



617



1207



2250



Pressure

MODEL SERIES	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
		VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
617CD32	1/7	220/50	SP	1.01	.96	.91	.80	.59	—	—	—	40	40	0
617CA32	1/7	115/60	SP	1.22	1.16	1.10	.97	.74	.56	—	—	50	60	0
688CGHI44	1/3	220-240/50-230/60	PSC	1.27	1.24	1.22	1.14	.94	.82	.70	.58	100	100	0
688CE44	1/3	115/60	PSC	1.60	1.54	1.48	1.37	1.21	1.05	.91	.76	100	100	0
668CGHI44	1/3	220-240/50-230/60	PSC	1.27	1.24	1.22	1.14	.94	.82	.70	.58	100	100	0
668CE44	1/3	115/60	PSC	1.60	1.54	1.48	1.37	1.21	1.05	.91	.76	100	100	0
1207PK80	3/4	115/60	CS	3.78	3.72	3.66	3.43	3.04	2.69	2.33	1.99	125	125	120
2250ZC 35/24	—	24V	BLDC	.78	.63	.59	.50	—	—	—	—	20	30	0
250ZA 35/24	—	24V	BLDC	.65	.60	.57	.49	—	—	—	—	20	30	0
2505CE28	1/3	115/60	PSC	2.55	2.30	2.10	1.80	1.24	—	—	—	35	40	0
2505CHI38	1/3	220-240/50	PSC	2.70	2.56	2.40	2.10	—	—	—	—	25	30	0
2665PE40	1/3	115/60/1	PSC	3.68	—	—	3.20	2.64	2.18	1.75	1.42	100	120	100
2665PHI44	1/3	220/240/50/1	PSC	3.23	—	—	2.76	2.21	1.77	1.35	1.00	100	120	100
2680CGHI42	1/3	220-240/50-230/60	PSC	3.59	3.50	3.38	3.08	—	—	—	—	30	30	0
2680CE44	1/3	115/60	PSC	4.40	4.34	4.23	3.84	—	—	—	—	30	30	0
2685PE40	1/3	115/60/1	PSC	3.68	—	—	3.20	2.64	2.18	1.75	1.42	100	120	100
2685PHI44	1/3	220/240/50/1	PSC	3.23	—	—	2.76	2.21	1.77	1.35	1.00	100	120	100
2688CHI22	1/4	220-240/50	PSC	1.40	1.32	1.25	1.13	.85	.60	.38	.22	100	100	0
2688CE22	1/4	115/60	PSC	1.68	1.61	1.55	1.40	1.10	.80	.60	.40	100	100	0
2688CHI44	1/3	220-240/50	PSC	2.70	2.60	2.50	2.25	—	—	—	—	25	25	0
2688CE44	1/3	115/60	PSC	3.15	3.04	2.93	2.72	—	—	—	—	25	25	0
2668CHI22	1/4	220-240/50	PSC	1.40	1.32	1.25	1.13	.85	.60	.38	.22	100	100	0
2668CE22	1/4	115/60	PSC	1.68	1.61	1.55	1.40	1.10	.80	.60	.40	100	100	0
2668CHI44	1/3	220-240/50	PSC	2.70	2.60	2.50	2.25	—	—	—	—	25	25	0
2668CE44	1/3	115/60	PSC	3.15	3.04	2.93	2.72	—	—	—	—	25	25	0
2660CGHI42	1/3	220-240/50-230/60	PSC	3.59	3.50	3.38	3.08	—	—	—	—	30	30	0
2660CE44	1/3	115/60	PSC	4.40	4.34	4.23	3.84	—	—	—	—	30	30	0
2750CGHI50	1/3	220-240/50-230/60	PSC	4.34	4.17	4.00	3.61	2.92	—	—	—	30	40	0
2750CE50	1/3	115/60	PSC	5.35	5.09	4.84	4.38	—	—	—	—	30	30	0
2807CGHI72	1	240-220/50-230/60	PSC	5.48	5.31	5.15	4.90	4.26	3.61	3.11	2.53	50	120	100
2807CE72	1	115/60	PSC	6.60	6.40	6.20	5.90	5.13	4.35	3.75	3.05	50	120	100

Specifications continued

Pressure

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
617CD32	50° F	104° F	1.9	225	2.5	B	1150	YES	11.0	6.78 x 5.00 x 8.10
617CA32	50° F	104° F	4.6	285	6.4	B	1400	YES	11.0	6.78 x 5.00 x 8.10
688CGHI44	50° F	104° F	1.5/1.3	270/270	3.9/3.8	B	1400/1700	YES	14.5	6.68 x 5.18 x 7.87
688CE44	50° F	104° F	3.6	325	9.2	B	1660	YES	11.75	6.68 x 5.18 x 7.87
668CGHI44	50° F	104° F	1.5/1.3	270/270	3.9/3.8	B	1380/1720	YES	14.5	7.19 x 5.18 x 7.28
668CE44	50° F	104° F	3.6	325	9.2	B	1650	YES	11.75	7.19 x 5.18 x 7.28
1207PK80	50° F	104° F	10.6	800	38.5	B	1700	YES	26.0	10.01 x 6.53 x 10.70
2250ZC 35/24	30° F	104° F	3.0	75	—	B	2000	YES	2.5	4.21 x 3.09 x 6.04
250ZA 35/24	30° F	104° F	—	50	2.10	B	2000	YES	1.9	4.54 x 3.02 x 4.26
2505CE28	50° F	104° F	2.7	310	5.9	B	1630	YES	11.75	6.46 x 4.44 x 9.25
2505CHI38	50° F	104° F	1.4/1.5	305/340	3.1/3.3	B	1300/1330	YES	12.5	6.46 x 4.44 x 10.25
2665PE40	50° F	104° F	5.8	660	14.6	B	1700	YES	16.0	7.09 x 5.18 x 9.31
2665PHI44	50° F	104° F	5.8	660	14.6	B	1700	YES	16.0	7.09 x 5.18 x 9.31
2680CGHI42	50° F	104° F	1.9/2.2	405/475	5.8/5.6	B	1400/1680	YES	15.0	7.09 x 7.40 x 9.61
2680CE44	50° F	104° F	5.0	530	14.6	B	1670	YES	14.8	7.09 x 7.40 x 9.61
2685PE40	50° F	104° F	2.5	545	14.6	B	1435	YES	16.0	7.09 x 5.18 x 9.31
2685PHI44	50° F	104° F	2.5	545	14.6	B	1435	YES	16.0	7.09 x 5.18 x 9.31
2688CHI22	50° F	104° F	1.2	210	3.6	B	1410	YES	14.3	6.68 x 6.20 x 10.09
2688CE22	50° F	104° F	3.3	250	12.8	B	1740	YES	14.3	6.68 x 6.20 x 10.09
2688CHI44	50° F	104° F	1.6	325	3.8	B	1290	YES	16.1	6.68 x 6.31 x 9.52
2688CE44	50° F	104° F	4.7	470	12.8	B	1600	YES	16.1	6.68 x 6.20 x 10.09
2668CHI22	50° F	104° F	1.2	210	3.6	B	1410	YES	14.3	7.09 x 5.18 x 9.31
2668CE22	50° F	104° F	3.3	250	12.8	B	1740	YES	14.3	7.09 x 5.18 x 9.31
2668CHI44	50° F	104° F	1.6	325	3.8	B	1290	YES	16.1	7.09 x 5.18 x 9.31
2668CE44	50° F	104° F	4.7	470	12.8	B	1600	YES	16.1	7.09 x 5.18 x 9.31
2660CGHI42	50° F	104° F	1.9/2.2	405/475	5.8/5.6	B	1400/1680	YES	15.0	6.75 x 5.34 x 9.36
2660CE44	50° F	104° F	4.8	530	15.4	B	1690	YES	15.0	6.75 x 5.34 x 9.36
2750CGHI50	50° F	104° F	2.2/2.4	520/540	8.7	B	1400/1675	YES	21.0	9.29 x 5.37 x 10.09
2750CE50	50° F	104° F	4.6	513	17.0	B	1690	YES	20.0	9.29 x 5.37 x 10.09
2807CGHI72	50° F	104° F	5.0/4.8	948/929	20.0	B	1425	YES	39.0	10.03 x 6.54 x 15.71
2807CE72	50° F	104° F	8.5	902	44.0	B	1700	YES	39.0	10.03 x 6.54 x 15.71

2665



2680/2688



2660/2668



2685



2750



2807



WOB-L® Piston Pumps & Compressors continued

2505



2680/2688



2660/2668



Vacuum											
MODEL SERIES	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (CFM @ IN.HG.)						VACUUM (IN.HG.)	
		VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
307CDC56/12		1/5	12v	PM	.81	.48	—	—	.14	—	25.025.0
327CDC40/12	1/5	12v	PM	1.12	.69	—	—	.24	—	25.0	25.0
337CDC56/12	1/5	12v	PM	1.15	.83	—	—	.19	—	25.0	25.0
415CDC30/12	1/10	12v	PM	.92	.75	.54	.34	.20	—	24.6	24.6
617CD22	1/8	220/50	SP	.69	.53	.40	.26	.14	—	26.1	0
617CA22	1/8	115/60	SP	.78	.63	.47	.31	.16	.02	25.6	0
617CD32	1/7	220/50	SP	1.01	.75	.55	.35	.19	—	26.2	0
617CA32	1/7	115/60	SP	1.22	.87	.65	.45	.23	—	26.8	0
2250ZC 35/24	—	24V	BLDC	1.18	.93	.68	.46	.24	—	26.0	0
688CGHI44	1/3	220-240/50-230/60	PSC	1.27	1.22	.81	.55	.32	.09	27.5	0
688CE44	1/3	115/60	PSC	1.60	1.15	.90	.62	.33	.10	27.6	0
668CGHI44	1/3	220-240/50-230/60	PSC	1.27	1.22	.81	.55	.32	.09	27.5	0
668CE44	1/3	115/60	PSC	1.60	1.15	.90	.62	.33	.10	27.6	0
2505CE28	1/3	115/60	PSC	2.55	1.95	1.45	.95	.45	.10	25.3	0
2505CHI38	1/3	220-240/50	PSC	2.70	2.25	1.65	1.10	.60	.18	25.5	0
2680CGHI42	1/3	220-240/50-230/60	PSC	3.59	2.44	1.83	1.26	.65	.11	27.0	0
2680CE44	1/3	115/60	PSC	4.40	2.96	2.22	1.52	.83	.16	27.0	0
2688CHI22	1/4	220-240/50	PSC	1.40	1.00	.80	.39	.29	.09	26.3	0
2688CE22	1/4	115/60	PSC	1.68	1.20	.93	.63	.33	.10	26.2	0
2688CHI44	1/3	220-240/50	PSC	2.70	2.00	1.40	.98	.57	.17	27.6	0
2688CE44	1/3	115/60	PSC	3.15	2.30	1.60	1.10	.64	.18	27.6	0
2688VGI44	1/3	220-240/50-230/60	PSC	1.36	1.16	.88	.65	.41	.19	29.0	0
2688VE44	1/3	115/60	PSC	1.60	1.20	.98	.69	.48	.16	29.0	0
2668CHI22	1/4	220-240/50	PSC	1.40	1.00	.80	.39	.29	.09	26.2	0
2668CE22	1/4	115/60	PSC	1.68	1.20	.93	.63	.33	.10	26.2	0
2668CHI44	1/3	220-240/50	PSC	2.70	2.00	1.40	.98	.57	.17	27.6	0
2668CE44	1/3	115/60	PSC	3.15	2.30	1.60	1.10	.64	.18	27.6	0
2660CGHI42	1/3	220-240/50-230/60	PSC	3.59	2.44	1.83	1.26	.65	.11	27.0	0
2660CE44	1/3	115/60	PSC	4.40	2.96	2.22	1.52	.83	.16	27.0	0
2750CGHI50	1/3	220-240/50-230/60	PSC	4.34	3.08	2.40	1.60	.89	.14	27.0	0
2750CE50	1/3	115/60	PSC	5.35	3.65	2.85	1.90	1.05	.15	26.0	0
2807CGH72	1	220/50-230/60	PSC	5.48	3.66	2.21	1.41	.56	—	25.0	0
2807CE72	1	115/60	PSC	6.60	3.60	2.66	1.80	.88	—	25.0	0

Specifications continued

Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
307CDC56/12	-40° F	158° F	13.7	N/A	71.0	B	2300	YES	6.0	6.14 x 4.00 x 7.65
327CDC40/12	-40° F	158° F	16.5	N/A	110.0	B	3100	YES	6.1	6.14 x 4.00 x 7.65
337CDC56/12	-40° F	158° F	19.6	N/A	116.0	B	3200	YES	6.5	6.14 x 4.00 x 8.37
415CDC30/12	50° F	104° F	10.2	N/A	42.0	A	3846	YES	5.0	5.34 x 4.25 x 7.26
617CD22	50° F	104° F	1.3	174	2.1	B	1105	YES	11.0	6.78 x 5.00 x 8.10
617CA22	50° F	104° F	3.1	189	5.5	B	1540	YES	11.0	6.78 x 5.00 x 8.10
617CD32	50° F	104° F	1.9	225	2.5	B	1150	YES	11.0	6.78 x 5.00 x 8.10
617CA32	50° F	104° F	4.6	285	6.4	B	1400	YES	11.0	6.78 x 5.00 x 8.10
2250ZC 35/24	30° F	104° F	3.0	75	—	B	2000	YES	2.5	4.21 x 3.09 x 6.04
688CGHI44	50° F	104° F	1.5/1.3	270/270	3.9/3.8	B	1400/1700	YES	14.5	6.68 x 5.18 x 7.87
688CE44	50° F	104° F	3.6	325	9.2	B	1660	YES	11.75	6.68 x 5.18 x 7.87
668CGHI44	50° F	104° F	1.5/1.3	270/270	3.9/3.8	B	1380/1720	YES	14.5	7.19 x 5.18 x 7.28
668CE44	50° F	104° F	3.6	325	9.2	B	1650	YES	11.75	7.19 x 5.18 x 7.28
2505CE28	50° F	104° F	2.7	310	5.9	B	1630	YES	11.75	6.46 x 4.44 x 9.25
2505CHI38	50° F	104° F	1.4/1.5	305/340	3.1/3.3	B	1300/1330	YES	12.5	6.46 x 4.44 x 10.25
2680CGHI42	50° F	104° F	1.9/2.2	405/475	5.8/5.6	B	1400/1680	YES	15.0	7.09 x 7.40 x 9.61
2680CE44	50° F	104° F	5.0	530	14.6	B	1670	YES	14.8	7.09 x 7.40 x 9.61
2688CHI22	50° F	104° F	1.2	210	3.6	B	1410	YES	14.3	6.68 x 6.20 x 10.09
2688CE22	50° F	104° F	3.3	250	12.8	B	1740	YES	14.3	6.68 x 6.20 x 10.09
2688CHI44	50° F	104° F	1.6	325	3.8	B	1290	YES	16.1	6.68 x 6.31 x 9.52
2688CE44	50° F	104° F	4.7	470	12.8	B	1600	YES	16.1	6.68 x 6.20 x 10.09
2688VGH144	50° F	104° F	0.7/0.8/0.8	135/155/160	3.7/4.1/3.8	B	1470/1480/1750	YES	16.4	6.68 x 6.20 x 10.09
2688VE44	50° F	104° F	3.2	240	12.2	B	1750	YES	16.4	6.68 x 6.20 x 10.09
2668CHI22	50° F	104° F	1.2	210	3.6	B	1410	YES	14.3	7.09 x 5.18 x 9.31
2668CE22	50° F	104° F	3.3	250	12.8	B	1740	YES	14.3	7.09 x 5.18 x 9.31
2668CHI44	50° F	104° F	1.6	325	3.8	B	1290	YES	16.1	7.09 x 5.18 x 9.31
2668CE44	50° F	104° F	4.7	470	12.8	B	1600	YES	16.1	7.09 x 5.18 x 9.31
2660CGHI42	50° F	104° F	1.9/2.2	405/475	5.8/5.6	B	1400/1680	YES	15.0	6.75 x 5.34 x 9.36
2660CE44	50° F	104° F	4.8	530	15.4	B	1690	YES	15.0	6.75 x 5.34 x 9.36
2750CGHI50	50° F	104° F	2.2/2.4	520/540	8.7	B	1400/1675	YES	21.0	9.29 x 5.37 x 10.09
2750CE50	50° F	104° F	4.6	513	17.0	B	1690	YES	20.0	9.29 x 5.37 x 10.09
2807CGH72	50° F	104° F	5.0/4.8	948/929	20.0	B	1425	YES	39.0	10.03 x 6.54 x 15.71
2807CE72	50° F	104° F	8.5	902	44.0	B	1700	YES	39.0	10.03 x 6.54 x 15.71

2750



2807



Articulated Piston Compressors

TA-2101DC
TA-3101DC
TA-4101DC



Pressure																							
MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)																MAXIMUM PRESSURE		
			VOLTAGE	TYPE	0	5	10	20	30	40	50	60	70	80	90	100	110	120	130	140	C	I	R
TA-2101DC	270046	1/6	12v	PM	1.40	1.32	1.25	1.10	—	.80	—	.60	—	.45	—	.35	—	—	—	—	100	100	100
TA-3101DC	270024	1/4	12v	PM	1.70	1.62	1.55	1.40	—	1.18	—	1.00	—	.85	—	.70	—	—	—	—	100	100	100
TA-4101DC	270025	1/3	12v	PM	2.20	2.07	1.95	1.75	—	1.45	—	1.25	—	1.10	—	.95	—	—	—	—	100	100	100
TA-4101DC	270047	1/3	24v	PM	2.20	2.07	1.95	1.75	—	1.45	—	1.25	—	1.10	—	.95	—	—	—	—	100	100	100
TA-5102DC	270058	1/2	12v	PM	4.06	3.81	3.54	3.42	—	3.02	—	2.72	—	2.12	—	1.61	—	—	—	—	100	100	100
TA-5102E	270063	1/2	12v	PM	3.35	—	3.05	2.80	2.65	2.50	2.25	2.10	1.90	1.80	1.60	1.50	1.43	1.37	1.32	1.28	150	150	150
TA-5102E	270064	1/2	12v	PM	3.35	—	2.80	2.65	2.50	2.25	2.10	1.90	1.80	1.60	1.50	1.43	1.37	1.32	1.28	1.25	150	150	150

Articulated Piston Compressors

HP-1500/HP-1000
HP-1050/HP-1550



Pressure															
MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
HP-1000	230001	1.0	115/230/60/1	CS/CR	7.5	7.1	6.8	6.2	5.2	4.8	3.7	3.3	125	125	125
HP-1000	230005	1.0	230/460/60/3	Poly	7.5	7.1	6.8	6.2	5.2	4.8	3.7	3.3	125	125	125
HP-1050	230011	1.0	115/230/60/1	CS/CR	9.8	9.2	8.6	7.7	6.4	—	—	—	50	50	50
HP-1050	230015	1.0	230/460/60/3	Poly	9.8	9.2	8.6	7.7	6.4	—	—	—	50	50	50
HP-1500	230002	1.5	115/230/60/50/1	CS/CR	10.0	9.5	9.0	8.4	7.3	6.6	5.9	5.2	125	125	125
HP-1500	230006	1.5	208/230/460/60/3	Poly	10.0	9.5	9.0	8.4	7.3	6.6	5.9	5.2	125	125	125
HP-1550	230012	1.5	115/230/60/50/1	CS/CR	10.4	10.0	9.6	8.9	8.0	—	—	—	50	50	50
HP-1550	230016	1.5	208/230/460/60/3	Poly	10.4	10.0	9.6	8.9	8.0	—	—	—	50	50	50

TA-2101/TA-3101/TA-4101



Articulated Piston Compressors

TA-4102/TA-5102
TA-6102/TA-7102



Pressure															
MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
TA-2101	270003	1/6	115/60/50/1	SPh	1.25	1.21	1.17	.95	.73	.60	.45	.35	100	100	100
TA-3101	270005	1/4	115/230/60/1	CS	1.60	1.50	1.40	1.25	1.03	.85	.71	.60	100	100	100
TA-4101	270015	1.3	115/60/1	CS/CR	2.20	2.12	2.05	1.90	1.65	1.45	1.25	1.10	100	100	100
TA-4102	270010	1/3	115/230/60/1	CS	2.60	2.50	2.40	2.20	1.80	1.45	1.35	1.20	100	100	100
TA-5102	270011	1/2	115/230/60/1	CS	3.20	3.05	2.90	2.68	2.40	2.10	1.90	1.65	100	100	100
TA-6102	270012	3/4	115/230/60/1	CS	4.30	4.15	4.00	3.75	3.30	2.95	2.60	2.40	100	100	100
TA-7102	270045	1.0	115/230/60/1	CS/CR	5.40	5.30	5.20	5.00	4.60	4.20	3.75	3.30	100	100	100
TA-4172	160644	1/3	115/230/60/1	CS	1.40	1.39	1.38	1.35	1.30	1.25	1.20	1.15	175	175	175
TA-5172	160642	1/2	115/230/60/1	CS	1.80	1.79	1.79	1.79	1.75	1.72	1.69	1.65	175	175	175
TA-6172	160646	3/4	115/230/60/1	CS	2.40	2.39	2.39	2.37	2.34	2.31	2.28	2.25	175	175	175

Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD				SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)	INSUL. CLASS				
TA-2101DC	32° F	104° F	23.0	N/A	149	H	1800	NO	16.0	5.83 x 8.61 x 10.54
TA-3101DC	32° F	104° F	26.0	N/A	156	H	1800	NO	22.0	6.75 x 5.34 x 9.36
TA-4101DC	32° F	104° F	28.0	N/A	198	H	1800	NO	22.0	5.83 x 8.61 x 12.54
TA-4101DC	32° F	104° F	18.5	N/A	92.5	H	1800	NO	25.0	5.83 x 9.12 x 12.54
TA-5102DC	32° F	104° F	45.0	N/A	230	H	1800	NO	40.0	6.81 x 9.96 x 15.32
TA-5102E	40° F	104° F	52.0	N/A	260	?	1800	NO	40.0	7.49 x 10.19 x 15.28
TA-5102E	40° F	104° F	26.0	N/A	130	?	1800	NO	40.0	7.49 x 10.19 x 15.28

TA-5102E



Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
HP-1000	40° F	104° F	11.2/5.6	1200	77/38	B	1725	YES	70.0	9.22 x 17.75 x 19.80
HP-1000	40° F	104° F	3.5/3.7/1.85	1220	31/15.5	B	1725	NO	70.0	9.22 x 17.75 x 19.80
HP-1050	40° F	104° F	11.2/5.6	1200	77/38	B	1725	YES	70.0	9.22 x 17.75 x 19.80
HP-1050	40° F	104° F	3.5/3.7/1.85	1220	31/15.5	B	1725	NO	70.0	9.22 x 17.75 x 19.80
HP-1500	40° F	104° F	13.0/6.5	1600	100.3/50	B	1725	YES	80.0	9.22 x 17.75 x 21.05
HP-1500	40° F	104° F	4.8/4.6/2.3	1600	46.8/23.4	B	1725	NO	80.0	9.22 x 17.75 x 20.63
HP-1550	40° F	104° F	13.0/6.5	1600	100.3/50	B	1725	YES	80.0	9.22 x 17.75 x 21.05
HP-1550	40° F	104° F	4.8/4.6/2.3	1600	46.8/23.4	B	1725	NO	80.0	9.22 x 17.75 x 20.63

Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
TA-2101	32° F	104° F	3.3/4.1	225/260	23/23.8	A	1725/1425	YES	20.0	7.94 x 5.70 x 11.13
TA-3101	32° F	104° F	5.0/2.5	350	23.2/11.9	B	1725	YES	21.0	7.91 x 5.70 x 11.57
TA-4101	32° F	104° F	3.5	430	23.2	B	1725	YES	24.0	7.91 x 5.70 x 12.26
TA-4102	32° F	104° F	8.0/4.0	450	34.8/18	B	1725	YES	36.0	6.88 x 9.83 x 14.03
TA-5102	32° F	104° F	7.2/3.6	760	37/19.7	B	1725	YES	37.0	6.88 x 9.83 x 15.06
TA-6102	32° F	104° F	10.6/5.3	825	60/30	B	1725	YES	44.0	6.88 x 9.83 x 15.31
TA-7102	32° F	104° F	12.0/8.0	1625	65/33	B	1725	YES	61.0	6.88 x 11.77 x 16.11
TA-4172	32° F	104° F	8.0/4.0	450	34.8/18.0	B	1725	YES	45.0	10.75 x 12.10 x 16.00
TA-5172	32° F	104° F	7.3/3.6	760	37.0/19.7	B	1725	YES	51.0	10.75 x 12.10 x 16.25
TA-6172	32° F	104° F	10.6/5.3	825	60.0/30.0	B	1725	YES	56.0	10.75 x 12.53 x 16.75

Linear Pumps & Compressors

SMG



Pressure

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (LPM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	1	2	3	4	5	6	7	CONTINUOUS	INTERMITTENT	RESTART
SMG 4	9040310	—	230/50	LM	1.4	1.2	1.0	.8	.5	.3	.1	—	6.5	6.5	6.5
SMG 4	9041310	—	115/60	LM	1.4	1.2	1.0	.8	.5	.3	.1	—	6.5	6.5	6.5
SMG 4	9045310	—	24	LM	1.3	1.1	.9	.7	.5	.3	.1	—	6.5	6.5	6.5
SMG 4	9046310	—	12	LM	1.3	1.1	.9	.7	.5	.3	.1	—	6.5	6.5	6.5

Vacuum

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (LPM @ IN.HG)						MAXIMUM VACUUM (IN.HG)		
			VOLTAGE	TYPE	0	2	4	6	8	10	CONTINUOUS	INTERMITTENT	RESTART
SMG 4	9040310	—	230/50	LM	1.4	1.1	.8	.5	.1	—	8.9	8.9	8.9
SMG 4	9041310	—	115/60	LM	1.4	1.1	.8	.5	.1	—	8.9	8.9	8.9
SMG 4	9045310	—	24	LM	1.3	1.0	.6	.3	—	—	7.4	7.4	7.4
SMG 4	904631	—	12	LM	1.3	1.0	.6	.3	—	—	7.4	7.4	7.4

Linear Pumps & Compressors

5006/5015/5020



5030-A, 5040-A, 5060-A
5030V-A, 5040V-A 5060V-A



5078S/5100S/5120S



5150S/5200S



Pressure

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)	
			VOLTAGE	TYPE	0	1	2	3	4	5	6	7	CONTINUOUS	RESTART
5006	150018	—	115	LM	.89	.48	.15	—	—	—	—	—	2.0	0
5015	150026	—	115	LM	1.06	.79	.48	.19	—	—	—	—	3.0	0
5020	150000	—	115	LM	1.24	1.00	.72	.41	.16	—	—	—	3.0	0
5030-A	150035	—	115	LM	2.00	1.62	1.20	.69	.14	—	—	—	3.5	0
5040-A	150037	—	115	LM	2.30	1.96	1.58	1.12	.60	.10	—	—	3.5	0
5060-A	150039	—	115	LM	3.20	2.80	2.38	1.88	1.40	.84	.31	—	3.5	0
5078S	150074	—	115	LM	3.60	3.45	3.20	2.75	2.10	1.35	.50	—	3.5	0
5100S	150044	—	115	LM	4.62	4.37	3.97	3.41	2.71	1.90	1.06	—	3.5	0
5120S	150045	—	115	LM	5.67	5.38	4.92	4.32	3.64	2.84	2.00	1.16	3.5	0
5150S	150046	—	115	LM	7.73	7.10	6.09	5.01	4.20	2.30	.72	—	3.5	0
5200S	150047	—	115	LM	9.55	8.78	8.05	7.11	5.90	4.76	3.33	1.61	3.5	0
6005SE	150081	—	115	LM	.41	.26	.12	.01	—	—	—	—	2.0	0
6015SE	150098	—	115	LM	1.10	.62	.09	—	—	—	—	—	1.5	0
6025SE	150057	—	115	LM	2.00	1.62	1.20	.70	.38	—	—	—	3.5	0
6025SE/12v	150108	—	12v	LM	1.50	1.08	.73	.41	.16	—	—	—	3.5	0
6025SE/24v	150109	—	24v	LM	1.50	1.08	.73	.41	.16	—	—	—	3.5	0

Vacuum

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (CFM @ IN.HG)						VACUUM (IN.HG)	
			VOLTAGE	TYPE	0	2	4	6	8	10	MAXIMUM	RESTART
6025SE	150057	—	115	LM	2.00	1.62	1.25	.80	.35	—	4.0	—
6025SE/12v	150108	—	12v	LM	1.50	1.09	.74	.43	.17	—	4.0	—
6025SE/24v	150109	—	24v	LM	1.50	1.09	.74	.43	.17	—	4.0	—
6015SE	150098	—	115	LM	1.10	.63	.10	—	—	—	3.0	—

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (CFM @ IN.HG)						VACUUM (IN.HG)	
			VOLTAGE	TYPE	0	2.5	5	7	8	10	MAXIMUM	RESTART
5006V	150024	—	115/60/1	LM	0.94	0.4	0.09	—	—	—	4.0	—
5015V	150025	—	115/60/1	LM	1.11	0.69	0.31	—	—	—	5.5	—
5020V	150001	—	115/60/1	LM	1.16	0.39	—	—	—	—	6.0	—
5030V-A	150036	—	115/60/1	LM	1.93	—	0.86	—	—	—	6.0	—
5040V-A	150038	—	115/60/1	LM	2.22	—	1.23	—	—	0.21	7.0	—
5060V-A	150040	—	115/60/1	LM	3.11	—	2.04	—	—	0.94	7.0	—

Specifications

Pressure

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
SMG 4	32° F	104° F	.03	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.06	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.18	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.32	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8

Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
SMG 4	32° F	104° F	.03	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.06	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.18	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8
SMG 4	32° F	104° F	.32	6	—	IP20	N/A	NO	.4	1.8 x 2.1 x 2.8

Specifications

Pressure

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
5006	32° F	104° F	.1	6	.1	A	—	YES	5.4	4.38 x 5.04 x 5.83
5015	32° F	104° F	.2	10	.2	A	—	YES	5.5	4.38 x 5.04 x 5.83
5020	32° F	104° F	.3	12	.3	A	—	YES	5.5	4.38 x 5.04 x 5.83
5030-A	32° F	104° F	.7	33	.7	A	—	YES	11.5	7.80 x 6.83 x 8.09
5040-A	32° F	104° F	1.0	44	1.0	A	—	YES	12.0	7.80 x 6.83 x 8.09
5060-A	32° F	104° F	1.5	69	1.5	A	—	YES	13.5	7.80 x 6.83 x 8.09
5078S	32° F	104° F	2.1	78	2.1	A	—	YES	18.5	8.59 x 7.05 x 8.94
5100S	32° F	104° F	2.7	107	2.7	A	—	YES	18.5	8.59 x 7.05 x 8.94
5120S	32° F	104° F	2.8	157	2.8	A	—	YES	18.5	8.59 x 7.05 x 8.94
5150S	32° F	104° F	2.9	168	2.9	A	—	YES	25.5	9.93 x 7.64 x 10.01
5200S	32° F	104° F	4.6	261	4.6	A	—	YES	25.5	9.93 x 7.64 x 10.01
6005SE	32° F	104° F	.12	10	.12	B	—	YES	1.1	3.13 x 2.93 x 3.77
6015SE	32° F	104° F	.23	15	.23	B	—	YES	2.7	3.33 x 4.60 x 5.05
6025SE	32° F	104° F	.46	40	.46	B	—	YES	3.3	3.33 x 4.60 x 5.05
6025SE/12v	32° F	104° F	2.7	—	2.7	B	—	NO	3.3	3.33 x 4.60 x 5.05
6025SE/24v	32° F	104° F	1.5	—	1.5	B	—	NO	3.3	3.33 x 4.60 x 5.05

6005SE



Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
6025SE	32° F	104° F	.46	40	.46	B	—	YES	3.3	3.33 x 4.60 x 5.05
6025SE/12v	32° F	104° F	2.7	—	2.7	B	—	NO	3.3	3.33 x 4.60 x 5.05
6025SE/24v	32° F	104° F	1.5	—	1.5	B	—	NO	3.3	3.33 x 4.60 x 5.05
6015SE	32° F	104° F	.23	15	.23	B	—	YES	2.7	3.33 x 4.60 x 5.05

6015SE/6025SE/6025SE DC



MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
5006V	32° F	104° F	.1	6	.1	A	—	YES	5.4	4.38 x 5.04 x 5.83
5015V	32° F	104° F	.2	10	.2	A	—	YES	5.5	4.38 x 5.04 x 5.83
5020V	32° F	104° F	.3	12	.3	A	—	YES	5.5	4.38 x 5.04 x 5.83
5030V-A	32° F	104° F	.7	33	.7	A	—	YES	12.5	7.80 x 6.83 x 8.09
5040V-A	32° F	104° F	1.0	44	1.0	A	—	YES	13.0	7.80 x 6.83 x 8.09
5060V-A	32° F	104° F	1.5	69	1.5	A	—	YES	14.5	7.80 x 6.83 x 8.09

Diaphragm Pumps & Compressors

1420



2002 DC



3013 DC




4002



5002 DC



5002 AC



7006Z



Pressure

MODEL SERIES	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (LPM @ PSI)								MAXIMUM PRESSURE (PSI)		
		VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
1420-0003	—	12	PM	8.1	4.9	2.5	—	—	—	—	—	2.9	10.0	2.9
2002-0304	—	4.5	PM	.38	.04	—	—	—	—	—	—	2.2	5.8	2.2
3013-0006	—	12	PM	1.2	.25	—	—	—	—	—	—	2.9	6.5	2.9
3013-0007	—	4.5	PM	.9	.12	—	—	—	—	—	—	2.9	6.5	2.9
3013-0008	—	6	PM	.9	.15	—	—	—	—	—	—	2.9	6.5	2.9
5002-0582	—	115/60	SP	1.7	1.3	1.0	—	—	—	—	—	4.35	17.4	0
5002-0408	—	12	PM	2.0	1.4	1.0	.5	—	—	—	—	4.35	17.4	17.4
5002-0416	—	24	PM	2.0	1.4	1.0	.5	—	—	—	—	4.35	17.4	17.4
5002-0397	—	6	PM	2.0	1.4	1.0	—	—	—	—	—	4.35	17.4	17.4
5002-0010	—	230/50	SP	1.7	1.3	1.0	—	—	—	—	—	4.35	17.4	0
7006-0050	—	12	PM	7.2	5.9	4.5	3.0	—	—	—	—	11.6	36.0	36
7006-0054*	—	12	PM	13.8	10.2	8.0	5.7	—	—	—	—	11.6	36.0	36
7006-0063	—	115/60	SP	7.2	5.5	4.7	3.5	—	—	—	—	11.6	36.0	0
7006-0052	—	24	PM	7.2	5.9	4.5	3.0	—	—	—	—	11.6	36.0	36
7006-0055*	—	24	PM	13.8	10.2	8.0	5.7	—	—	—	—	11.6	36.0	36
7006-0051	—	230/50	SP	6.6	5.3	4.5	3.0	—	—	—	—	11.6	36.0	0
7010-2502	—	12	PM	6.5	5.1	3.7	2.0	—	—	—	—	14.5	32.0	14.5
7010-2514	—	24	PM	6.5	5.1	3.7	2.0	—	—	—	—	14.5	32.0	14.5
7010-2167*	—	12	PM	12.0	9.0	6.6	2.9	—	—	—	—	11.6	29.0	0
7010-2133*	—	24	PM	12.0	9.0	6.6	2.9	—	—	—	—	11.6	29.0	0
7011-0008	—	12	PM	12.4	9.1	6.7	3.9	—	—	—	—	11.6	33.3	0
7011-0042	—	24	PM	12.4	9.1	6.7	3.9	—	—	—	—	11.6	33.3	0

*Twin Head Design

Vacuum

MODEL SERIES	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (LPM @ IN.HG.)						VACUUM (IN.HG.)	
		VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
2002-0304	—	4.5	PM	.38	.15	.04	—	—	—	11.8	4.4
3013-0006	—	12	PM	1.2	.5	1.5	—	—	—	11.8	5.9
3013-0007	—	4.5	PM	.9	.35	.07	—	—	—	11.8	5.9
3013-0008	—	6	PM	.9	.39	.09	—	—	—	11.8	5.9
4002-0008	—	7	PM	2.0	1.3	.7	.2	—	—	17.3	5.8
5002-0582	—	115/60	SP	1.7	1.0	.5	—	—	—	14.7	0
5002-0408	—	12	PM	2.0	1.3	.9	—	—	—	14.7	14.7
5002-0416	—	24	PM	2.0	1.3	.9	—	—	—	14.7	14.7
5002-0397	—	6	PM	2.0	1.3	.9	—	—	—	14.7	14.7
5002-0010	—	230/50	SP	1.7	1.0	.5	—	—	—	14.7	0
7006-0050	—	12	PM	7.2	4.5	3.1	1.8	.07	—	25.1	25.1
7006-0054*	—	12	PM	13.8	9.1	5.6	3.5	1.1	.5	25.1	25.1
7006-0063	—	115/60	SP	7.2	5.0	3.3	2.0	.9	—	25.1	0
7006-0057*	—	12	PM	6.6	5.1	3.8	2.3	1.2	.5	28.1	28.1
7006-0052	—	24	PM	7.2	4.5	3.1	1.8	.7	—	25.1	25.1
7006-0055*	—	24	PM	13.8	9.1	5.6	3.5	1.1	.5	25.1	25.1

*Twin Design

Specifications

Pressure

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
1420-0003	40° F	104° F	.7	8.5	—	F	—	NO	.05	3.01 x 1.19 x 3.44
2002-0304	40° F	122° F	.037	.2	N/A	A	N/A	NO	.07	1.0 x .7 x 1.6
3013-0006	50° F	104° F	.04	.5	—	A	N/A	NO	.07	1.3 x .89 x 1.71
3013-0007	50° F	104° F	.09	.3	—	A	N/A	NO	.07	1.3 x .89 x 1.71
3013-0008	50° F	104° F	.05	.4	—	A	N/A	NO	.07	1.3 x .89 x 1.71
5002-0582	50° F	104° F	.50	23	N/A	F	2,600	NO	1.3	3.3 x 2.4 x 3.8
5002-0408	50° F	122° F	.34	4	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0416	50° F	122° F	.17	4	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0397	50° F	122° F	.68	4	—	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0010	50° F	104° F	.30	—	—	F	2200	NO	1.3	3.3 x 2.4 x 3.8
7006-0050	59° F	104° F	2.3	28	5.4	B	2800	NO	1.4	3.07 x 1.85 x 4.85
7006-0054*	59° F	104° F	3.7	48	8.7	B	2800	NO	2.0	3.07 x 1.85 x 5.99
7006-0063	59° F	104° F	.9	67	1.15	H	3000	NO	2.1	3.07 x 2.40 x 4.85
7006-0052	59° F	104° F	1.15	28	2.7	B	2800	NO	1.4	3.07 x 1.85 x 4.85
7006-0055*	59° F	104° F	2.0	48	4.7	B	2800	NO	2.0	3.07 x 1.85 x 5.99
7006-0051	59° F	104° F	.55	62	0.7	F	2400	NO	2.1	3.07 x 2.4 x 4.85
7010-2502	59° F	104° F	1.04	13	5.9	E	3500	NO	1.3	3.4 x 1.9 x 4.7
7010-2514	59° F	104° F	.52	13	3.4	E	3200	NO	1.3	3.4 x 1.9 x 4.7
7010-2167*	59° F	104° F	1.7	20	4.5	E	3800	NO	1.6	3.4 x 1.9 x 6.3
7010-2133*	59° F	104° F	0.9	20	3.5	E	3900	NO	1.6	3.4 x 1.9 x 6.3
7011-0008	59° F	104° F	1.7	29	4.5	E	3800	NO	2.0	3.4 x 2.4 x 5.7
7011-0042	59° F	104° F	0.9	29	3.5	E	3900	NO	2.0	3.4 x 2.4 x 5.7


7006 DC




7006 AC



7010 DC



7011 DC



Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
2002-0304	40° F	122° F	.037	.2	N/A	A	N/A	NO	.07	1.0 x .7 x 1.6
3013-0006	50° F	104° F	.04	—	—	A	N/A	NO	.07	1.3 x .89 x 1.71
3013-0007	50° F	104° F	.09	—	—	A	N/A	NO	.07	1.3 x .89 x 1.71
3013-0008	50° F	104° F	.05	—	—	A	N/A	NO	.07	1.3 x .89 x 1.71
4002-0008	50° F	104° F	.43	3	—	—	4700	NO	.12	1.19 x .69 x 2.09
5002-0582	50° F	104° F	.50	23	N/A	F	2,600	NO	1.3	3.3 x 2.4 x 3.8
5002-0408	50° F	122° F	.34	4	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0019	50° F	122° F	.17	4	N/A	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0018	50° F	122° F	.68	4	—	A	3000	NO	.4	2.1 x 1.2 x 3.1
5002-0010	50° F	104° F	.3	—	—	F	3000	NO	1.3	3.3 x 2.4 x 3.8
7006-0050	59° F	104° F	2.3	28	5.4	B	2800	NO	1.3	3.07 x 1.85 x 4.85
7006-0054*	59° F	104° F	3.7	48	8.7	B	2800	NO	2.0	3.07 x 1.85 x 5.99
7006-0063	59° F	104° F	.9	67	1.15	H	3000	NO	2.1	3.07 x 2.40 x 4.85
7006-0057*	59° F	104° F	3.7	48	8.7	B	2800	NO	2.0	3.07 x 1.85 x 5.99
7006-0052	59° F	104° F	1.15	28	2.7	B	2800	NO	1.3	3.07 x 1.85 x 4.85
7006-0055*	59° F	104° F	2.0	48	4.7	B	2800	NO	2.0	3.07 x 1.85 x 5.99

continued →

Diaphragm Pumps & Compressors continued

7011Z DC



Vacuum

MODEL SERIES	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (LPM @ IN.HG.)						VACUUM (IN.HG.)	
		VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
7006-0051	—	230/50	SP	6.6	4.2	3.1	1.0	0.7	—	25.1	0
7010-2502	—	12	PM	6.5	4.1	2.9	1.9	1.1	—	21.5	21.5
7010-2514	—	24	PM	6.5	4.1	2.9	1.9	1.1	—	21.5	21.5
7010-2167*	—	12	PM	12.0	8.5	5.6	2.9	0.9	—	22.1	0
7010-2133*	—	24	PM	12.0	8.5	5.6	2.9	0.9	—	22.1	0
7011-0008	—	12	PM	12.4	8.3	5.5	3.0	0.9	—	21.5	0
7011-0042	—	24	PM	12.4	8.3	5.5	3.0	0.9	—	21.5	0
7011-0037*	—	12	PM	7.0	5.2	3.5	2.3	1.6	—	28.6	28.6
7011-0069*	—	24	PM	7.0	5.2	3.5	2.3	1.6	—	28.6	28.6

*Twin Design

008



Diaphragm Pumps & Compressors

Pressure

MODEL SERIES	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
		VOLTAGE	TYPE	0	5	10	15	20	25	30	35	CONTINUOUS	INTERMITTENT	RESTART
008CDU13	1/30	220/50 -240/50	SP	.54	.44	.33	.24	.18	—	—	—	15	20	0
008CA13	1/30	115/60	SP	.61	.45	.31	.21	.14	—	—	—	15	20	0
007CDC13	1/32	12v	PM	.60	.45	.34	.25	.15	—	—	—	15	20	20
107CCD18	1/20	230/60 -220/50	SP	.55	.43	.34	.24	.17	.13	.08	—	20	30	0
107CGH18	1/20	230/60 -220/50	PSC	.59	.52	.44	.36	.29	.21	.13	—	20	30	0
107CAB18	1/20	115/60 -110/50	SP	.69	.60	.51	.40	.31	.23	.14	—	20	30	0
107CEF18	1/20	115/60 -110/50	PSC	.73	.66	.55	.45	.35	.27	.18	—	30	30	0
107CDC20	1/10	12v	PM	1.40	1.34	1.12	.94	.77	.62	.49	.39	35	35	15
915CD18	1/15	220/50	SP	1.16	1.00	.80	.61	.45	.31	.20	.13	20	35	0
915CA18	1/15	115/60	SP	1.30	1.13	.95	.74	.58	.41	.25	.13	20	35	0
915CA23	1/15	115/60	SP	1.63	1.49	1.31	1.14	.99	.83	.70	.57	15	25	0
907CDC18	1/10	12v	PM	2.05	1.67	1.30	.93	.72	.53	.35	—	30	30	5
910CDC22	1/6	12v	PM	1.97	1.72	1.47	1.29	1.10	.95	.79	.64	25	40	20
927CD18	1/8	220/50	SP	1.15	1.00	.87	.72	.61	.46	.37	.30	30	40	0
927CA18	1/8	115/60	SP	1.24	1.11	.96	.81	.65	.52	.44	.35	30	40	0
2107CH20	1/20	220/50	PSC	1.40	1.20	1.00	.82	.65	.51	.41	—	20	30	0
2107CD20	1/20	220/50	SP	1.37	1.00	—	—	—	—	—	—	5	5	0
2107CEF20	1/20	115/60 -110/50	PSC	1.65	1.40	1.15	—	—	—	—	—	10	10	0
2107CA20	1/20	115/60	SP	1.65	1.33	—	—	—	—	—	—	5	5	0
2907CDC22	1/6	12v	PM	3.20	2.89	2.53	2.21	—	—	—	—	15	15	15

007DC



107



915/927



Specifications continued

Vacuum										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
7006-0051	59° F	104° F	.55	62	.7	F	2400	NO	2.1	3.07 x 2.4 x 4.85
7010-2502	59° F	104° F	1.04	13	5.9	E	3500	NO	1.3	3.4 x 1.9 x 4.7
7010-2514	59° F	104° F	.52	13	3.4	E	3200	NO	1.3	3.4 x 1.9 x 4.7
7010-2167*	59° F	104° F	1.7	20	4.5	E	3800	NO	1.6	3.4 x 1.9 x 6.3
7010-2133*	59° F	104° F	0.9	20	3.5	E	3900	NO	1.6	3.4 x 1.9 x 6.3
7011-0008	59° F	104° F	1.7	29	4.5	E	3800	NO	2.0	3.4 x 2.4 x 5.7
7011-0042	59° F	104° F	0.9	29	3.5	E	3900	NO	2.0	3.4 x 2.4 x 5.7
7011-0037*	59° F	104° F	3.8	46	11.7	E	3200	NO	3.0	3.8 x 2.3 x 7.6
7011-0069*	59° F	104° F	1.9	46	8.2	E	3200	NO	3.0	3.8 x 2.3 x 7.6

907DC



910DC



Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
008CDU13	50° F	104° F	.66/.74	93/109	1.4	B	2600/2752	YES	3.0	5.12 x 3.50 x 6.00
008CA13	50° F	104° F	1.90	144	2.8	B	3112	YES	2.5	5.12 x 3.50 x 6.00
007CDC13	50° F	104° F	2.8	N/A	36	F	2800	NO	2.9	5.09 x 3.37 x 6.25
107CCD18	50° F	104° F	.8/1.0	100/120	1.2	B	1620/1220	YES	5.1	4.69 x 4.25 x 6.83
107CGH18	50° F	104° F	.60/.62	119/125	.83/.93	B	1695/1340	YES	6.0	5.80 x 5.27 x 7.45
107CAB18	50° F	104° F	1.69/2.18	107/136	2.77/3.09	B	1630/1260	YES	5.1	4.69 x 4.25 x 6.83
107CEF18	50° F	104° F	1.05/1.48	90/118	2.07/2.17	B	1720/1330	YES	6.0	5.80 x 5.27 x 7.45
107CDC20	50° F	104° F	8.5	N/A	40.0	A	2970	NO	4.5	4.69 x 4.25 x 7.34
915CD18	50° F	104° F	1.20	157	1.74	B	1150	YES	9.0	6.78 x 4.75 x 7.89
915CA18	50° F	104° F	2.40	160	3.5	B	1550	YES	9.0	6.78 x 4.75 x 7.89
915CA18	50° F	104° F	2.40	160	3.5	B	1550	YES	9.0	6.78 x 4.75 x 7.89
915CA23	50° F	104° F	3.40	226	4.5	B	1450	YES	9.0	6.78 x 4.75 x 7.89
910CDC22/12	50° F	104° F	12.8	N/A	96.6	B	2160	NO	8.2	5.88 x 4.75 x 9.23
927CD18	50° F	104° F	1.30	171	2.1	B	1250	YES	11.0	6.78 x 4.75 x 7.89
927CA18	50° F	104° F	3.00	191	5.5	B	1625	YES	11.0	6.78 x 4.75 x 7.89
2107CH20	50° F	104° F	.6	125	.8	A	1225	YES	7.0	6.00 x 5.22 x 8.75
2107CD20	50° F	104° F	.8	113	1.3	A	1200	YES	6.0	4.69 x 4.25 x 8.09
2107CEF20	50° F	104° F	1.1/1.2	108/100	1.6/1.9	A	1500/1245	YES	7.0	6.00 x 5.22 x 8.75
2107CA20	50° F	104° F	1.6	123	2.6	B	1524	YES	6.0	4.69 x 4.25 x 8.09
2907CDC22	50° F	104° F	20	N/A	120	B	1900	NO	11.0	5.88 x 4.75 x 12.50

107DC



2107VA



2107



2207



Diaphragm Pumps & Compressors

2907DC



Vacuum

MODEL SERIES	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (CFM @ IN.HG.)						VACUUM (IN.HG.)	
		VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
008CDU13	1/30	220/50 -240/50	SP	.54	.39	.12	—	—	—	20.3	0
008CA13	1/30	115/60	SP	.61	.38	.23	.11	—	—	20.3	0
007CDC13	1/32	12v	PM	.60	.38	.24	.12	—	—	20.0	20.0
107CCD18	1/20	230/60 -220/50	SP	.55	.40	.27	.15	—	—	22.0	0
107CGH18	1/20	230/60 -220/50	PSC	.59	.46	.31	.17	.05	—	22.5	0
107CAB18	1/20	115/60 -110/50	SP	.69	.54	.36	.20	.05	—	22.1	0
107CEF18	1/20	115/60 -110/50	PSC	.73	.55	.38	.23	.07	—	22.7	0
107CDC20	1/10	12v	PM	1.40	1.09	.80	.48	—	—	22.9	22.9
915CD18	1/15	220/50	SP	1.16	.77	.53	.30	.08	—	22.5	0
915CA18	1/15	115/60	SP	1.30	.89	.64	.37	.13	—	22.4	0
907CDC18/12	1/10	12v	PM	2.05	1.25	.82	.48	—	—	22.2	21.9
910CDC22/12	1/6	12v	PM	1.97	1.53	1.05	.65	.28	—	24.3	24.3
927CD18	1/8	220/50	SP	1.15	.73	.53	.33	.11	—	23.8	0
927CA18	1/8	115/60	SP	1.24	.89	.64	.36	.16	—	23.8	0
2207BE18	1/20	115/60	PSC	2.57	1.88	1.24	.64	.09	—	21.0	0
2207BHI18	1/20	220/50	PSC	2.05	1.50	.99	.53	.09	—	21.0	0
2107CH20	1/20	220/50	PSC	1.40	1.00	.71	.42	.17	—	23.9	0
2107CD20	1/20	220/50	SP	1.37	.96	.64	.38	—	—	23.5	0
2107CEF20	1/20	115/60 -110/50	PSC	1.65	1.19	.85	.49	.18	—	23.3	0
2107CA20	1/20	115/60	SP	1.65	1.15	.77	.47	.17	—	23.2	0
2907CDC22	1/6	12v	PM	3.20	2.00	1.43	.90	.41	—	24.0	24.0

Rotary Pumps & Compressors

Pressure

MODEL SERIES	PART NO.	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (LPM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	1	1.5	3	5	7.5	10	15	CONTINUOUS	INTERMITTENT	RESTART
G6/01-K-LCL	50027	—	6v	PM	2.0	—	—	—	—	—	—	—	.36	.87	N/A
G6/01-EB	50081	—	6v	PM	1.0	.4	.1	—	—	—	—	—	1.16	1.74	N/A
G12/01-EB	50096	—	12v	PM	1.4	.8	.4	—	—	—	—	—	1.45	2.18	N/A
G12/02-EB	50095	—	12v	PM	3.6	2.2	1.5	—	—	—	—	—	1.45	2.61	N/A
BL-G12/02-4	50149	—	12v	BLDC	2.4	1.6	1.2	—	—	—	—	—	1.45	2.90	N/A
G6/04-EB	50102	—	6v	PM	4.7	1.8	.3	—	—	—	—	—	.73	1.60	N/A
G24/04-EB	50104	—	24v	PM	6.8	3.7	2.1	—	—	—	—	—	.58	2.18	N/A
G12/045	50200	—	12v	PM	5.5	4.9	4.6	3.8	2.6	1.1	—	—	2.18	9.43	N/A
G12/07-N	50316	—	12v	PM	20.0	18.5	17.7	15.4	12.4	8.5	4.7	—	3.63	13.05	N/A
G12/08	50325	—	12v	PM	15.5	14.6	14.2	12.8	11.0	8.8	6.6	2.1	4.35	17.40	N/A
BL-G12/085-M	50209	—	12v	BLDC	8.5	7.2	6.5	4.6	2.0	—	—	—	2.18	6.53	N/A
G12/09-6-LC	50532	—	12v	PM	9.0	7.2	6.3	3.7	0.1	—	—	—	2.18	5.08	N/A

G/01-EB



G/02-EB



G/04-EB



Vacuum

MODEL SERIES	PART NO.	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (LPM @ IN.HG)								VACUUM (IN.HG)		
			VOLTAGE	TYPE	0	1	1.5	3	5	10	15	20	CONTINUOUS	INTERMITTENT	RESTART
G6/01-K-LCL	50027	—	6v	PM	2.0	.9	.3	—	—	—	—	—	.74	1.77	N/A
G6/01-EB	50081	—	6v	PM	1.0	.7	.6	.2	—	—	—	—	2.36	3.54	N/A
G12/01-EB	50096	—	12v	PM	1.4	1.1	1.0	.5	—	—	—	—	2.95	4.73	N/A
G12/02-EB	50095	—	12v	PM	3.6	2.9	2.6	1.6	.2	—	—	—	2.95	5.32	N/A
BL-G12/02-4	50149	—	12v	BLDC	2.4	2.0	1.8	1.3	.6	—	—	—	2.95	6.50	N/A
G6/04-EB	50102	—	6v	PM	4.7	3.4	2.7	.7	—	—	—	—	1.48	3.54	N/A
G24/04-EB	50104	—	24v	PM	6.8	5.4	4.6	2.5	—	—	—	—	1.18	4.73	N/A
G12/045	50200	—	12v	PM	5.5	5.2	5.0	4.5	3.9	2.3	.7	—	4.43	17.13	N/A
G12/07-N	50316	—	12v	PM	20.0	19.0	18.5	17.1	15.2	10.3	5.5	7	7.38	20.68	N/A
G12/08	50325	—	12v	PM	15.5	14.8	14.5	13.5	12.2	8.9	5.7	2.4	8.86	23.63	N/A
BL-G12/085-M	50209	—	12v	BLDC	8.5	7.9	7.6	6.8	5.6	2.7	—	—	4.43	14.77	N/A
G12/09-6-LC	50532	—	12v	PM	9.0	8.1	7.7	6.4	4.6	.3	—	—	4.43	10.34	N/A

Specifications

Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
008CDU13	50° F	104° F	.66/74	93/109	1.4	B	2600/2752	YES	3.0	5.12 x 3.50 x 6.00
008CA13	50° F	104° F	1.90	144	2.8	B	3112	YES	2.5	5.12 x 3.50 x 6.00
007CDC13	50° F	104° F	2.8	N/A	36	F	2800	NO	2.9	5.09 x 3.37 x 6.25
107CCD18	50° F	104° F	.8/1.0	100/120	1.2	B	1620/1220	YES	5.1	4.69 x 4.25 x 6.83
107CGH18	50° F	104° F	.60/62	119/125	.83/93	B	1695/1340	YES	6.0	5.80 x 5.27 x 7.45
107CAB18	50° F	104° F	1.69/2.18	107/136	2.77/3.09	B	1630/1260	YES	5.1	4.69 x 4.25 x 6.83
107CEF18	50° F	104° F	1.05/1.48	90/118	2.07/2.17	B	1720/1330	YES	6.0	5.80 x 5.27 x 7.45
107CDC20	50° F	104° F	8.5	N/A	40.0	A	2970	NO	4.5	4.69 x 4.25 x 7.34
915CD18	50° F	104° F	1.20	157	1.74	B	1150	YES	9.0	6.78 x 4.75 x 7.89
915CA18	50° F	104° F	2.40	160	3.5	B	1550	YES	9.0	6.78 x 4.75 x 7.89
907CDC18/12	50° F	104° F	10.8	N/A	40.0	A	2680	NO	6.5	5.88 x 4.75 x 7.84
910CDC22/12	50° F	104° F	12.8	N/A	96.6	B	2160	NO	8.2	5.88 x 4.75 x 9.23
927CD18	50° F	104° F	1.30	171	2.1	B	1250	YES	11.0	6.78 x 4.75 x 7.89
927CA18	50° F	104° F	3.00	191	5.5	B	1625	YES	11.0	6.78 x 4.75 x 7.89
2207BE18	50° F	104° F	1.2	140	1.6	A	1670	YES	11.0	6.21 x 6.18 x 9.75
2207BHI18	50° F	104° F	.7	135	1.0	A	1360	YES	11.0	6.21 x 6.18 x 9.75
2107CH20	50° F	104° F	.6	125	.8	A	1225	YES	7.0	6.00 x 5.22 x 8.75
2107CD20	50° F	104° F	.8	113	1.3	A	1200	YES	6.0	4.69 x 4.25 x 8.09
2107CEF20	50° F	104° F	1.1/1.2	108/100	1.6/1.9	A	1500/1245	YES	7.0	6.00 x 5.22 x 8.75
2107CA20	50° F	104° F	1.6	123	2.6	B	1524	YES	6.0	4.69 x 4.25 x 8.09
2907CDC22	50° F	104° F	20	N/A	120	B	1900	NO	11.0	5.88 x 4.75 x 12.50

Specifications

Pressure

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
G6/01-K-LCL	32° F	104° F	.23	1.4	—	IP40	—	NO	.06	.81 x .79 x 1.81
G6/01-EB	-22° F	122° F	.19	1.1	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
G12/01-EB	-22° F	122° F	.20	2.4	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
G12/02-EB	-22° F	122° F	.33	4.0	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
BL-G12/02-4	32° F	104° F	.34	—	—	IP00	—	NO	.22	1.47 x 1.37 x 2.05
G6/04-EB	-22° F	122° F	.48	2.9	—	IP50	—	NO	.22	1.14 x 1.02 x 2.44
G24/04-EB	-22° F	122° F	.26	6.2	—	IP50	—	NO	.22	1.14 x 1.02 x 2.44
G12/045	50° F	104° F	1.36	16.3	—	IP30	—	NO	.55	1.65 x 1.65 x 3.37
G12/07-N	14° F	104° F	4.60	55.2	—	IP40	—	NO	1.10	2.01 x 2.24 x 4.45
G12/08	14° F	104° F	3.20	38.4	—	IP40	—	NO	1.65	2.32 x 2.32 x 5.31
BL-G12/085-M	-40° F	140° F	2.00	—	—	IP00	—	NO	.33	1.97 x 1.97 x 1.73
G12/09-6-LC	-4° F	122° F	1.80	21.6	—	IP20	—	NO	.66	1.57 x 1.57 x 3.89

G/045



G/07



Vacuum

MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
G6/01-K-LCL	32° F	104° F	.23	1.4	—	IP40	—	NO	.06	.81 x .79 x 1.81
G6/01-EB	-22° F	122° F	.19	1.1	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
G12/01-EB	-22° F	122° F	.20	2.4	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
G12/02-EB	-22° F	122° F	.33	4.0	—	IP50	—	NO	.22	1.14 x 1.02 x 2.17
BL-G12/02-4	32° F	104° F	.34	—	—	IP00	—	NO	.22	1.47 x 1.37 x 2.05
G6/04-EB	-22° F	122° F	.48	2.9	—	IP50	—	NO	.22	1.14 x 1.02 x 2.44
G24/04-EB	-22° F	122° F	.26	6.2	—	IP50	—	NO	.22	1.14 x 1.02 x 2.44
G12/045	50° F	104° F	1.36	16.3	—	IP30	—	NO	.55	1.65 x 1.65 x 3.37
G12/07-N	14° F	104° F	4.60	55.2	—	IP40	—	NO	1.10	2.01 x 2.24 x 4.45
G12/08	14° F	104° F	3.20	38.4	—	IP40	—	NO	1.65	2.32 x 2.32 x 5.31
BL-G12/085-M	-40° F	140° F	2.00	—	—	IP00	—	NO	.33	1.97 x 1.97 x 1.73
G12/09-6-LC	-4° F	122° F	1.80	21.6	—	IP20	—	NO	.66	1.57 x 1.57 x 3.89

QR-0030
QR-0050



QR-0080
QR-0100



Rotary Pumps & Compressors

Pressure

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	5	10	15	20	25	30	35	CONTINUOUS	INTERMITTENT	RESTART
QR-0030	291305	1/3	100-115/200-240/60/50/1	SPh	3.2	2.7	2.2	1.7	—	—	—	—	10	15	0
QR-0050	291306	1/3	100-115/200-240/60/50/1	SPh	4.6	4.1	3.6	3.0	—	—	—	—	10	15	0
QR-0080	291303	3/4	100-115/200-240/60/50/1	CS	8.0	7.35	6.8	6.2	—	—	—	—	10	15	0
QR-0100	291304	3/4	100-115/200-240/60/50/1	CS	10.0	9.4	8.8	—	—	—	—	—	10	10	0
SR-0015-VP	291275	1/10	115/60/50/1	PSC	1.5	1.2	0.95	—	—	—	—	—	10	10	0
SR-0015-VP	291277	1/10	115/60/50/1	SPh	1.5	1.2	0.95	—	—	—	—	—	10	10	0

Vacuum

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		VACUUM PERFORMANCE (CFM @ IN.HG)						VACUUM (IN.HG)	
			VOLTAGE	TYPE	0	5	10	15	20	25	MAXIMUM	RESTART
QR-0030	291305	1/3	115/60/1	SPh	3.2	2.5	1.9	1.3	.6	—	25.0	0
QR-0050	291306	1/3	115/60/1	SPh	4.6	3.8	2.9	2.0	1.2	.3	26.0	0
QR-0080	291303	3/4	115/60/1	CS	8.0	6.4	4.8	3.4	2.0	.4	26.0	0
QR-0100	291304	3/4	115/60/1	CS	10.0	8.1	6.2	4.4	2.5	.8	26.0	0
SR-0015-VP	291275	1/10	115/60/50/1	PSC	1.5	1.1	.8	.5	.2	—	24.0	0
SR-0015-VP	291277	1/10	115/60/50/1	SPh	1.5	1.1	.8	.5	.2	—	24.0	0

405FDC



617FA/FCD



688FE44



Tank Mounted Pumps & Compressors

Pressure

MODEL SERIES	MFG. CODE	HP	MOTOR CAPACITY		COMPRESSOR PERFORMANCE (CFM @ PSI)								MAXIMUM PRESSURE (PSI)		
			VOLTAGE	TYPE	0	5	10	20	40	60	80	100	CONTINUOUS	INTERMITTENT	RESTART
405FDC38/12	—	1/10	12VDC	PM	.92	—	.71	.61	.53	.44	.35	.27	100	100	100
617FA22	—	1/8	115/60	SP	.84	—	.74	.64	.46	.31	.20	.10	100	100	100
617FCD22	—	1/8	230/60 220/50	SP	.78	—	.70	.61	.46	.33	.24	.12	100	100	100
688FE44	—	1/3	115/60/1	PSC	1.60	—	1.48	1.37	1.21	1.05	.91	.76	100	100	100
LGH-106-H02	160205	1/12	115/60/50/1	SPh	1.2	1.15	1.1	0.9	0.5	0.27	—	—	100	100	100
LGH-210-H02	160493	1/6	115/60/50/1	SPh	1.25	1.21	1.17	0.95	0.73	0.6	0.45	0.35	100	100	100
LGH-310-H02	260484	1/4	115/230/60/1	CS	1.6	1.5	1.4	1.25	1.05	0.85	0.7	0.6	100	100	100
GH-510B-H10	160688	1/2	115/230/60/1	CS	3.2	3.05	2.9	2.68	2.4	2.1	1.9	1.65	100	100	100
GH-610B-H10	160689	3/4	115/230/60/1	CS	4.3	4.15	4.0	3.75	3.3	2.95	2.6	2.4	100	100	100
CMD-75	270023	3/4	115/230/60/1	CS	4.3	4.15	4.0	3.75	3.3	2.95	2.6	2.4	100	100	100
CMD-50	270022	1/2	115/230/60/1	CS	3.2	3.05	2.9	2.68	2.4	2.1	1.9	1.65	100	100	100

Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
QR-0030	32° F	104° F	5.6/2.7	300/250	26.0/13.0	B	1725/1425	YES	33.0	5.80 x 5.63 x 13.56
QR-0050	32° F	104° F	5.6/2.7	360/315	26.0/13.0	B	1725/1425	YES	33.0	5.80 x 5.63 x 13.56
QR-0080	32° F	104° F	10.4/5.5	790/640	37.0/17.0	B	1725/1425	YES	54.0	8.37 x 6.50 x 16.41
QR-0100	32° F	104° F	10.4/5.5	900/760	37.0/17.0	B	1725/1425	YES	54.0	8.37 x 6.50 x 16.41
SR-0015-VP	32° F	104° F	1.6	120	5.0	B	3500	YES	8.0	4.94 x 3.86 x 8.27
SR-0015-VP	32° F	104° F	1.6	120	13.5	B	3500	YES	8.5	4.94 x 3.86 x 8.27

Vacuum										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
QR-0030	32° F	104° F	5.6/2.7	300/250	26.0/13.0	B	1725/1425	YES	33.0	5.80 x 5.63 x 13.56
QR-0050	32° F	104° F	5.6/2.7	360/315	26.0/13.0	B	1725/1425	YES	33.0	5.80 x 5.63 x 13.56
QR-0080	32° F	104° F	10.4/5.5	790/640	37.0/17.0	B	1725/1425	YES	54.0	8.37 x 6.50 x 16.41
QR-0100	32° F	104° F	10.4/5.5	900/760	37.0/17.0	B	1725/1425	YES	54.0	8.37 x 6.50 x 16.41
SR-0015-VP	32° F	104° F	1.6	120	5.0	B	3500	YES	8.0	4.94 x 3.86 x 8.27
SR-0015-VP	32° F	104° F	1.6	120	13.5	B	3500	YES	8.5	4.94 x 3.86 x 8.27

SR-0015VP



Specifications

Pressure										
MODEL SERIES	AMBIENT TEMPERATURE		ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	THERMAL PROTECTOR	NET WEIGHT (LBS.)	DIMENSIONS (H x W x L)
	MINIMUM	MAXIMUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)					
405FDC38/12	50° F	104° F	10.5	—	25	A	3310	YES	18.3	13.39 x 7.00 x 16.50
617FA22	50° F	104° F	3.1	189	5.3	A	1540	YES	25	14.86 x 7.00 x 16.50
617FCD22	50° F	104° F	1.3	174	2.1	A	1105	YES	25	14.86 x 7.00 x 16.50
688FE44	50° F	104° F	3.6	325	9.2	B	1650	YES	28.5	15.51 x 7.00 x 16.50
LGH-106-H02	32° F	104° F	2.1/2.6	150/200	7.8/8.4	A	1725	YES	39	15.86 x 8.44 x 19
LGH-210-H02	32° F	104° F	3.3/4.1	225/260	23/23.8	A	1725	YES	42	15.86 x 8.44 x 19
LGH-310-H02	32° F	104° F	5/2.5	400	20.1/10.3	B	1725	YES	43	15.86 x 8.44 x 19
GH-510B-H10	32° F	104° F	7.3/3.6	760	37/19.7	B	1725	YES	105	19.44 x 12.4 x 30
GH-610B-H10	32° F	104° F	10.6/5/3	825	60/30	B	1725	YES	105	19.44 x 12.4 x 30
CMD-75	32° F	104° F	10.6/5/3	825	60/30	B	1725	YES	74	17.25 x 16 x 16
CMD-50	32° F	104° F	7.3/3.6	760	37/19.7	B	1725	YES	72	17.25 x 16 x 16

LGH-106-H02/LGH-210-H02



GH-510B-H10/GH-610B-H10



CMD-50/CMD-75



Liquid Pumps

Diaphragm Pump

MODEL SERIES	ARTICLE NO.	MOTOR CAPACITY		OPEN FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	CONTINUOUS OPERATION	DIMENSIONS (H x W x L)
		VOLTAGE	TYPE					
5002F	5002-1402	12	DC	400 ml/min	15 m H ₂ O	6.0 m H ₂ O	YES	1.99 x 1.18 x 3.19
5002F	5002-1408	12	DC	400 ml/min	15 m H ₂ O	5.0 m H ₂ O	YES	1.99 x 1.18 x 3.19
5002FZ	5002-1079	12	DC	850 ml/min	15 m H ₂ O	5.0 m H ₂ O	YES	1.99 x 1.18 x 4.88
F120STEPPER	7120-0246 w/circuit board 7120-0242 w/o circuit board	24	AC/DC	1-260 ml/min	> 50 m H ₂ O	4.0 m H ₂ O	YES	3.31 x 2.36 x 2.20
FP210	7210-0154	115/60/1	AC/DC	2200 ml/min	20 m H ₂ O	1.5 m H ₂ O	YES	5.63 x 4.29 x 4.69
F120	7120-0017	12	DC	980 ml/min	20 m H ₂ O	4.0 m H ₂ O	YES	3.31 x 2.36 x 2.20

FLG 12/01



FP210AC



Linear Diaphragm Pump

MODEL SERIES	ARTICLE NO.	MOTOR CAPACITY		OPEN FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	CONTINUOUS OPERATION	DIMENSIONS (H x W x L)
		VOLTAGE	TYPE					
SMF 4	3	230/50/1	AC	.27 l/min	8.0 m H ₂ O	2.0 m H ₂ O	YES	1.59 x 1.38 x 2.84
SMF 4	3	115/60/1	AC	.27 l/min	8.0 m H ₂ O	2.0 m H ₂ O	YES	1.59 x 1.38 x 2.84
SMF 4	3	24	DC	.26 l/min	8.0 m H ₂ O	2.0 m H ₂ O	YES	1.59 x 1.38 x 2.84
SMF 4	3	12	DC	.24 l/min	8.0 m H ₂ O	2.0 m H ₂ O	YES	1.59 x 1.38 x 2.84

F120G



Rotary Vane Pump

MODEL SERIES	ARTICLE NO.	MOTOR CAPACITY		OPEN FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	CONTINUOUS OPERATION	DIMENSIONS (H x W x L)
		VOLTAGE	TYPE					
FLG 12/01-LC	52110	12	DC	1.3 l/min	—	236" H ₂ O	YES	1.2 x 1.2 x 3.00

SR15



Peristaltic Pump

MODEL SERIES	ARTICLE NO.	MOTOR CAPACITY		OPEN FLOW	PRESSURE HEIGHT	SUCTION HEIGHT	CONTINUOUS OPERATION	DIMENSIONS (H x W x L)
		VOLTAGE	TYPE					
SR15	2015-0232	115/60/1	AC	11 ml/min	397.70" H ₂ O	314.96" H ₂ O	NO	3.51 x 2.68 x 2.48
SR15	2015-0324	115/60/1	AC	46 ml/min	397.70" H ₂ O	314.96" H ₂ O	NO	3.51 x 2.68 x 2.48
SR25	2025-0130	24	DC	264 ml/min	397.70" H ₂ O	314.96" H ₂ O	YES	3.98 x 3.15 x 5.32
SR25	2025-1255	24	DC	25 ml/min	397.70" H ₂ O	314.96" H ₂ O	YES	3.98 x 3.15 x 5.32
SR25	2025-1413	24	DC	118 ml/min	397.70" H ₂ O	314.96" H ₂ O	YES	3.98 x 3.15 x 5.32
SR30	2030-0319	12	DC	55 ml/min	314.96" H ₂ O	314.96" H ₂ O	NO	3.19 x 2.20 x 2.68
SR30	2030-0348	24	DC	55 ml/min	314.96" H ₂ O	314.96" H ₂ O	NO	3.19 x 2.20 x 2.68
SR100	2100-1006	12	DC	1.3 l/min	314.96" H ₂ O	314.96" H ₂ O	NO	4.43 x 4.17 x 5.63

SR25



Specifications

Diaphragm Pump

MODEL SERIES	AMBIENT TEMPERATURE			ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	NET WEIGHT (kg)
	MINIMUM	MAXIMUM	MEDIUM	RUN (AMPS)	POWER (WATTS)	START (AMPS)			
5002F-EPDM	0° C	40° C	0° C - 70° C	0.4	5	1.7	A	3000	0.19
5002F-PTFE	15° C	40° C	15° C - 70° C	0.58	7	1.7	A	3000	0.19
5002FZ	0° C	40° C	0° C - 70° C	0.8	9	3.6	E	3000	0.34
F120G	0° C	40° C	0° C - 70° C	2.0	24	5.4	E	3000	0.7
FP210	0° C	40° C	0° C - 70° C	0.9	68	1.05	A	3100	0.7

5002F



Linear Diaphragm Pump

MODEL SERIES	AMBIENT TEMPERATURE			ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	NET WEIGHT (lbs.)
	MINIMUM	MAXIMUM		RUN (AMPS)	POWER (WATTS)	START (AMPS)			
SMF 4	0° C	60° C	—	28 mA	6	—	IP20	—	0.18
SMF 4	0° C	60° C	—	58 mA	6	—	IP20	—	0.18
SMF 4	0° C	60° C	—	320 mA	6	—	IP20	—	0.18
SMF 4	0° C	60° C	—	180mA	6	—	IP20	—	0.18

5002FZ



Rotary Vane Pump

MODEL SERIES	AMBIENT TEMPERATURE			ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	NET WEIGHT (lbs.)
	MINIMUM	MAXIMUM		RUN (AMPS)	POWER (WATTS)	START (AMPS)			
FLG 12/01-LC	-5° C	70° C	—	1.1	—	—	E	—	3.2 oz.

SR10/30



Peristaltic Pump

MODEL SERIES	AMBIENT TEMPERATURE			ELECTRICAL RATED LOAD			INSUL. CLASS	SPEED (RPM)	NET WEIGHT (lbs.)
	MINIMUM	MAXIMUM		RUN (AMPS)	POWER (WATTS)	START (AMPS)			
SR15	0° C	40° C	—	—	4.5	—	A	10	0.28
SR15	0° C	40° C	—	—	4.5	—	A	20	0.28
SR25	0° C	40° C	—	—	7.0	—	—	170	0.6
SR25	0° C	40° C	—	—	—	—	—	30	0.6
SR25	0° C	40° C	—	—	2.0	—	—	65	0.6
SR30	0° C	40° C	—	.18 - 0.3	—	—	—	3000	0.16
SR30	0° C	40° C	—	.09 - .15	—	—	—	3000	0.16
SR50	0° C	40° C	—	0.4 - .54	—	—	—	3000	0.2
SR50	0° C	40° C	—	0.2 - .27	—	—	—	3000	0.2
SR100	0° C	40° C	—	3.0	—	—	—	3000	0.95

SR10/50



SR10/100



Worldwide Manufacturing and Distribution

SALES OFFICES

Hong Kong, China
Tokyo, Japan
Alton, UK
Australia
Austria
Brazil
Czech Republic
Denmark
France
Hungary
Italy
Korea
Netherlands
New Zealand
Slovakia
Sweden
Switzerland
Taiwan

MFG. LOCATIONS ●

Sheboygan, WI, USA
Monroe, LA, USA
Puchheim, Germany
Memmingen, Germany
Wuxi, China



Distributed by:

The information presented in this material is based on technical data and test results of nominal units. It is believed to be accurate and reliable and is offered as an aid to help in the selection of Thomas products. It is the responsibility of the user to determine the suitability of the product for the intended use and the user assumes all risk and liability in connection there with. Thomas does not warrant, guarantee or assume any obligation or liability in connection with this information.

NOTE: Models presented in this catalog are only a small sampling of those available. Models shown can be equipped with a choice of optional motors, heads, strokes, diaphragm materials, corrosion protections and other accessories. To obtain further information, contact your local Thomas distributor or Thomas' main office. Photos of models pictured in this catalog are representative of the series and do not represent a specific model number. Consult factory for detailed physical description.

Printed in USA
Form No. 850-3344 5/07
©2007 Gardner Denver Thomas, Inc. All rights reserved.

THOMAS
A Gardner Denver Product

Thomas Products Division

1419 Illinois Avenue
Sheboygan, WI 53081 USA
(920) 457-4891
FAX (920) 451-4276
Internet: www.thomaspumps.com